

Electrical – High and Low Voltage

Document number: PRO-00006

This document is the property of Seqwater. It must not be copied or reproduced in any way whatsoever without the authority of Seqwater. This document is uncontrolled when printed. An electronic database manages and stores the controlled version.

| Ver No. | Description | Document Owner | | Document Approver | | |
|---------|-----------------|-------------------------------------|---------------------------------|----------------------------------|---------------------------------|---------------|
| | | Position | Approval | Position | Approval | Approval Date |
| 11 | Amended Version | Programs & Systems Business Partner | Refer to supporting Info in Rex | Manager Health, Safety & Quality | Refer to supporting Info in Rex | 19/08/2024 |

Contents

- 1. Purpose 4**
- 2. Scope 4**
- 3. Critical Controls 4**
- 4. Additional Controls 5**
 - 4.1. General electrical safety Risk management 5
 - 4.2. Examples of electrical control measures 5
 - 4.3. Specific hazard and risk control 6
 - 4.4. General requirements for Electrical Equipment 7
- 5. General electrical safety requirements for workers carrying out Electrical Work 9**
 - 5.1. Electrical Supervision requirements 9
 - 5.2. Electrical Work 9
 - 5.3. Electrical tools, test equipment and safety 12
 - 5.4. Electrical Equipment 14
 - 5.5. Electrical Exclusion Zones 16
 - 5.6. Working near underground electrical services 20
 - 5.7. Electrical testing and tagging 20
- 6. Live Low Voltage Electrical Work 21**
 - 6.1. Preparation of workers, PPE and test equipment 21
- 7. Performing Live electrical fault-finding work 23**
 - 7.1. Completing Live electrical fault-finding work 23
- 8. High Voltage Requirements 23**
 - 8.1. High Voltage access requirements 23
 - 8.2. Preparation for HV work 25
 - 8.3. High Voltage Isolation and Earthing 27
 - 8.4. High Voltage access 31
 - 8.5. Re-energisation of High Voltage equipment 35
 - 8.6. High Voltage records 35
 - 8.7. Emergency HV Switching 36
- 9. Definitions 37**
- 10. Roles and Responsibilities 49**
- 11. Training 53**

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|---------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 2 of 65 |

12. References and Related Materials 54

 12.1. Legal and other requirements..... 54

 12.2. Seqwater documents 54

13. Record keeping 55

Appendix A – Electrical apprentice supervision requirements 56

Appendix B – Electrical Safety Observer requirements 57

Appendix C – Test and Tag requirements 58

Appendix D – High Voltage access flowchart 59

Appendix E – High Voltage Isolation and Access (HVIA) requirements 60

Appendix F – Guide to selection of Personal Protective Equipment..... 61

Appendix G– Electrical Licencing Requirements..... 62

Appendix H – Installation Safety Management Plan Requirements 65

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|---------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 3 of 65 |

This document is the property of Seqwater. It must not be copied or reproduced in any way whatsoever without the authority of Seqwater. This document is uncontrolled when printed. An electronic database manages and stores the controlled version.

1. Purpose

The intent of this document is to set Seqwater minimum requirements to control the risk associated with Low Voltage (LV) and High Voltage (HV) electricity and to eliminate or minimise the risks of fatalities, injuries and events arising from high and Low Voltage Electrical Works at Seqwater workplaces.

2. Scope

This Procedure applies to all Seqwater workers, business groups and work activities.

3. Critical Controls

| Critical Controls for High and Low Voltage Electrical Work | | | |
|--|---|---------|--|
| # | Critical Controls | | Objective |
| 1 | Seqwater personnel are not permitted to perform Live High Voltage work | HV | To prevent Seqwater workers working on Seqwater's Live HV equipment / assets e.g. Energex Live line work |
| 2 | Remote Switching | HV/LV | To prevent a worker being in close proximity to a HV arc flash or blast during Switching activities |
| 3 | Rated electrical PPE is donned and in good condition | HV / LV | To mitigate the effects of exposure to LV/HV electricity and arc flash/blast |
| 4 | Locked area (room / yard / enclosure) where HV equipment is contained | HV | Prevent unauthorised Persons from accessing Live parts |
| 5 | Isolation of all electrical sources of energy | HV / LV | To ensure all sources of electrical energy have been de-energised, and positively isolated |
| 6 | Locked switchboard where Live parts or public location | HV / LV | Prevent unauthorised Persons from accessing Live parts |
| 7 | No unauthorised Person, plant or equipment is permitted to enter an overhead power exclusion zone | HV / LV | To prevent person, plant or equipment arcing or contacting with Live overhead powerlines |
| 8 | Effective earthing / equipotential bonding | HV / LV | To ensure protective devices operate correctly |
| 9 | LV Rescue | LV | To remove a worker exposed to LV from continued exposure to live electricity. |
| 10 | Emergency Services assistance | HV / LV | To minimise the impact of exposure to electrical energy on human life |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|---------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 4 of 65 |

| Critical Controls for High and Low Voltage Electrical Work | | | |
|--|---|----|---|
| # | Critical Controls | | Objective |
| 11 | Portable electrical equipment and leads must be in good condition, tested and tagged, fit for purpose and protected from exposure to water unless specifically rated for that purpose | LV | To prevent the use of damaged / faulty or non-protected portable Electrical Equipment |
| 12 | Residual Current Device (RCD) | LV | To mitigate the effects of exposure to LV electricity |

4. Additional Controls

- Prior to undertaking Electrical Work or work activities involving a potential electrical hazard, a risk assessment must be undertaken to determine the hazards present, and the controls required, to allow the work to be undertaken safely. The outcome of the assessment must be documented and follow the process documented in the HSW Risk Management Procedure ([PRO-00657](#)).
- Consideration should also be given to bringing a defibrillator to the work area. If a risk assessment or the SWMS determines a spotter is required, a defibrillator must be brought to the work area.
- Electrical Work at Seqwater workplaces must only be undertaken by workers who hold current Electrical Licences for the work that they are undertaking. Electrical Engineers who have completed an Engineering Electrical Safety Competency and are on the electrical register can carry out limited Electrical Work.

4.1. General electrical safety Risk management

Prior to undertaking Electrical Work or work activities involving a potential electrical hazard, a risk assessment must be undertaken to determine the hazards present, and the controls required, to allow the work to be undertaken safely. The outcome of the assessment must be documented in a Safe Work Method Statement (SWMS).

Risk assessments of Electrical Work or work activities involving a potential electrical hazard must be undertaken in accordance with the HSW Risk Management Procedure ([PRO-00657](#)). In conducting an electrical risk assessment, the following five steps must be used:

- STEP 1 – Hazard Identification.
- STEP 2 – Risk Assessment
- STEP 3 – Control risks (select using the hierarchy of controls (elimination should be the first choice).
- STEP 4 – Monitor and review risk control measures.

4.2. Examples of electrical control measures

Once hazards have been identified and the risks assessed, appropriate control measures must be put in place. Controls must be used to select the control that most effectively eliminates or minimises the risk in the

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|---------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 5 of 65 |

circumstances, so far as is reasonably practicable. This may involve a single control measure or a combination of two or more different controls.

The chosen risk control measures should not, so far as be reasonably practicable, introduce new hazards to the work activity.

| Hierarchy of control | Examples of risk control measures |
|--------------------------------------|--|
| Elimination | Eliminating risk factors by designing-in or designing-out certain features, hazards may be eliminated. |
| Substitution | Use extra-Low Voltage Electrical Equipment such as a battery-operated tool rather than a tool that is plugged into mains electricity. |
| Isolation | Isolating electricity so it is not Live, thus preventing workers from coming into contact with electricity while undertaking work. |
| Engineering controls | Installing residual current devices (commonly referred to as Safety Switches) to reduce the risk of receiving a fatal Electric Shock. |
| Administrative controls* | Establishing Exclusion Zones, use of permits and warning signs. Bringing defibrillator to work area for immediate mitigation of injury. |
| Personal protective* equipment (PPE) | PPE includes protective eyewear, insulated gloves, hard hats, aprons and breathing protection. Most forms of PPE are not relevant to minimising electrical risks in workplaces, except in relation to energised Electrical Work. |

* Administrative controls and personal protective equipment should only be considered where there is residual risk after the higher order controls have been utilised.

4.3. Specific hazard and risk control

There are a number of things you should do to manage the risks to health and safety associated with electrical risks at the workplace including the following:

- confirm power circuits are protected by the appropriate rated fuse or circuit breaker to prevent overloading
- check that leads, including cord extension sets and flexible cables, are arranged so they will not be damaged. For example, avoid running leads across the floor or ground, through doorways and over sharp edges, and use lead stands or insulated cable hangers to keep leads off the ground.
- not using leads and tools in damp or wet conditions unless they are designed for those conditions
- check circuits where portable Electrical Equipment can be connected are protected by appropriate Safety Switches (as required by the Electrical Safety Regulation) that are properly tested and maintained
- if Safety Switches, circuit breakers or other over current protective devices including fuses are triggered into operation, ensuring circuits are not re-energised until the reason for the operation has been determined by a Competent Person (electrical)
- check Safety Switches are effective by regular testing (refer Appendix C)
- where necessary, isolate the electrical supply in ceiling areas before entering these areas.

Regular visual inspection of Electrical Equipment will assist in determining whether it is electrically safe. Visual inspection of Electrical Equipment may involve, in part:

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|---------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 6 of 65 |

- looking for obvious damage, defects or modifications to the Electrical Equipment, including accessories, connectors, plugs or cord extension sockets
- looking for discolouration that may indicate exposure to excessive heat, chemicals or moisture
- check the Electrical Equipment has a valid test and tag label.

4.4. General requirements for Electrical Equipment

All Electrical Equipment at Seqwater workplaces must be designed, constructed, installed, protected, maintained and tested and tagged.

The following are general safety rules when using Electrical Equipment or undertaking Electrical Work at an Seqwater workplace:

- always check that the Electrical Equipment used has been tested and tagged and is in current test date
- all portable Electrical Equipment used must be connected to a Safety Switch (refer to Section 3.4.2 for further information on Safety Switches)
- if using a portable Safety Switch, always test that it trips after the equipment being used is plugged in, by pressing the test button on the side of the Safety Switch
- ladders and work platforms used for Electrical Work at Seqwater workplaces must be of fiberglass construction i.e. ladders made of conductive material (e.g. metal) must not be used to perform any Electrical Work
- never use a double adaptor or piggy back plug in a workshop, construction site or other work areas, including offices; use an appropriate power board
- if any electrical leads to portable equipment are damaged, or single insulated coloured cables are showing, do not use the equipment
- if personal Electrical Equipment is to be used at the workplace by a worker, the worker needs to visually check that it is safe, has been tested and tagged and is in current test date (i.e. radio, charger, etc.)
- look for obvious damage, defects or modifications to the Electrical Equipment, including accessories, connectors, plugs or cord extension sockets
- check that flexible cords are effectively anchored to equipment, plugs, connectors and cord extension sockets
- check that covers, guards, etc. are secured and working in the manner intended by the manufacturer or supplier
- check that ventilation inlets and exhausts are unobstructed.

All Electrical Equipment that is hired for use at an Seqwater workplace, or brought onto an Seqwater workplace by a third party must be:

- visually inspected to check that it is in a safe condition
- tested and tagged and is in current test date
- inspected, tested and tagged for the duration that the equipment is hired.

4.4.1. Unsafe Electrical Equipment

If any Electrical Equipment is found to be faulty or is out of test date, the following actions must be undertaken:

- the equipment must be immediately disconnected or isolated and removed from use and tagged with an 'Out of Service' tag (and lock where practical)
- the Line Supervisor is to be notified immediately

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|---------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 7 of 65 |

- the 'Out of Service' tag (and lock where used) is only to be removed and the equipment returned to service when the piece of Electrical Equipment is repaired or replaced and tested and tagged by an Electrical Worker.

4.4.2. General requirements for Safety Switches

All portable Electrical Equipment used at a Seqwater workplace must be connected to either a fixed or portable Safety Switch.

All electrical Safety Switches installed or used at Seqwater workplaces must comply with the requirements of AS/NZS 3190 Approval and test specification – Residual current devices (current-operated earth leakage devices) when tested.

All Safety Switches, other than portable Safety Switches, at Seqwater workplaces must:

- be tested by a Competent Person under *AS/NZS 3760 In-service Safety Inspection and Testing of Electrical Equipment* immediately after it is connected
- be tested under, and at the intervals stated in *AS/NZS 3760 In-service Safety Inspection and Testing of Electrical Equipment*.

All portable Safety Switches at Seqwater workplaces must:

- be tested by pushing the test button on the Safety Switch immediately after it is connected
- be tested in accordance with, and at the intervals stated in, *AS/NZS 3760 In-service Safety Inspection and Testing of Electrical Equipment*.

4.4.3. Managing static electricity

Static electricity has the potential to cause inadvertent ignition of flammable mixtures and can also lead to other operating problems in electrical and control systems.

The management of static electricity must be undertaken in accordance with the *AS/NZS 1020 The Control of Undesirable Static Electricity*.

4.4.4. Wall penetration

Prior to penetrating walls all electrical services must be positively identified and the work planning must consider the following controls:

- Positively identify the location of the electrical services.
- If the penetration is adjacent to the electrical services, isolate the electrical services.
- If the location of the electrical services is unknown or cannot be confirmed, the electrical service must be de-energised prior to commencement.
- Confirm any electrical circuit in the vicinity is RCD protected.
- Wear insulated gloves and use insulated tools when penetrating the wall.

Penetration Permit ([FRM-00636](#)) is required for all penetrations that may impact on structural integrity, including penetrations into solid walls, ceilings and floors that:

- are deeper than 50mm and greater than 50mm diameter
- penetrate all the way through

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|---------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 8 of 65 |

5. General electrical safety requirements for workers carrying out Electrical Work

5.1. Electrical Supervision requirements

Supervision of Electrical Work must only be performed by appropriately trained and licensed Electrical Workers, refer to Appendix A.

For all Electrical Supervision, the following actions must be undertaken by the Electrical Worker undertaking the supervision to comply with the *Electrical Safety Act (Qld)* and the *Electrical Safety Regulation (Qld)* and Seqwater management systems:

- take all reasonably practicable steps to confirm the electrical safety of workers involved in the Electrical Work
- provide electrical advice and support for all workers undertaking Electrical Work
- develop or review work procedures, risk assessments and work instructions to safely undertake Electrical Work
- train staff in correct applications of procedures and work instructions
- check that suitable controls are in place to manage the risks of undertaking Electrical Work
- undertake inspections on Electrical Work being performed to confirm that the Electrical Work is carried out in accordance with documented procedures.

An Electrical Worker who undertakes Electrical Work, or provides direct supervision of Electrical Work, is required to sign the work order associated with the work to assume accountability for the work undertaken.

Electrical Workers are responsible for ensuring that all apprentices perform Electrical Work competently and safely with the appropriate level of supervision and do not come into physical contact with any energised Electrical Equipment.

Electrical apprentice supervision requirements for performing Electrical Work at Seqwater workplaces is included in Appendix A of this Procedure. Note that an apprentice/trainee cannot, in the first 6 months of the apprenticeship/training program work be:

- in the immediate vicinity of a Live High Voltage exposed part
- where there is a risk of contact with a Live Low Voltage exposed part.

5.2. Electrical Work

5.2.1. How to manage Electrical Work licences

It is the responsibility of engaging officer requesting the Electrical Work to be undertaken, and the Electrical Worker performing the work, to make sure that the Electrical Worker is licenced for the Electrical Work to be undertaken refer to Appendix G.

Electrical Licence details for Seqwater employees must be maintained in the Electrical Worker Register. This register located in the 'Our Learning System' must include:

- the Electrical Licence holder's name
- the number of the Electrical Licence, or if it is an external licence, the number, code or another way of identifying the Electrical Licence

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|---------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 9 of 65 |

- class of the Electrical Licence
- if the licence is a restricted Electrical Work licence - the type of Electrical Work stated on the licence
- the conditions or restrictions included in the licence
- the day the licence expires
- if the licence is an external licence - the jurisdiction.

Electrical Supervisors will be informed from 'Our Learning System' to check the licencing requirements of employees within their area of responsibility continue to meet the requirements of the *Electrical Safety Act (Qld)* and *Electrical Safety Regulation (Qld)*. Likewise, Managers or supervisors of Electrical Engineers on the electrical register must check these engineers maintain currency of training. Employees must provide Seqwater's Learning and Organisational Development Team with the information they require to maintain the register.

All new electrical starters must complete the Verification of Competency Assessment-New Starter Electrical Worker Checklist [FRM-01101](#).

Confirmation of Electrical Licence details can be obtained by undertaking a search of Electrical Workers on the Electrical Safety Office website.

5.2.2. Seqwater employees, qualified Electrical Engineers

The *Electrical Safety Act (Qld)* requires a person performing or supervising Electrical Work to be the holder of an Electrical Work licence authorising the person to perform the work. Section 55(3) of the Act lists exemptions from this requirement, including for the purpose of performance or supervision of Electrical Work in practising the person's profession as an Electrical Engineer.

Seqwater requires any Seqwater Electrical Engineer who is required to undertake Electrical Work as part of their duties to be included on the Electrical Workers Register. To be added to this register, the Electrical Engineer must complete the Engineering Electrical Safety Competency module. This assessment will:

- verify the person's qualifications
- confirm that the person has read and understood the requirements of this Procedure
- confirm the person has completed all pre-requisite training
- confirm the person has been issued with required PPE
- nominate any restrictions on permitted Electrical Work.
- be an authorised isolator and be assessed as competent by ESIG

5.2.3. External contractors

Seqwater will only engage licenced electrical contractors to perform Electrical Work which the electrical contractor is licenced to perform. Electrical contractors will be engaged in accordance with the requirements of the Contractor Management Procedure (HSW, Env & DWQ) ([PRO-00808](#)).

A licenced electrical contractor engaged to perform Electrical Work at a Seqwater workplace must provide their licence details on the work order for the work being undertaken and the engaging officer must review the licencing of contractors.

On completion of the work, contractors shall provide a Certificate of Testing and Compliance or a Certificate of Testing and Safety. A Certificate of Testing and Compliance certifies the electrical installation, to the extent it is affected by the Electrical Work, has been tested to check it is electrically safe. A Certificate of Testing and Safety certifies that the Electrical Equipment, to the extent it is affected by the Electrical Work, is electrically safe.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 10 of 65 |

Where work was completed under isolation the isolation officer will be provided the Certificate of Testing and Safety or Certificate of Testing and Compliance for review prior to re-energisation.

Refer to Appendix G – Licencing Requirements.

5.2.4. Preparing for general Electrical Work

No Electrical Work will be undertaken other than in accordance with this Procedure.

No Live Low Voltage Electrical Work is to be undertaken other than in accordance with section 5.

No Live High Voltage work will be undertaken other than isolation and access work in accordance with section 6.

All exposed parts of Electrical Equipment must be treated as energised or ‘Live’ until the equipment is isolated and proved not to be energised, with any related High Voltage exposed parts Earthed.

Before Electrical Work is carried out, all Electrical Equipment shall be tested to prove the electrical installation and equipment is electrically safe and that all personnel are not exposed to electrical risk.

Consideration should also be given to bringing a defibrillator to the work area. If a risk assessment or the SWMS determines a spotter is required, a defibrillator must be brought to the work area.

Detailed requirements for Live Low Voltage Electrical Work and High Voltage Isolation and access are defined in the relevant sections of this Procedure, sections 7 and 8 respectively.

5.2.5. Electrical Isolations

All Electrical Isolations must be planned and performed in accordance with the Energy Tag and Lockout Procedure ([PRO-00014](#)). Isolations for Electrical Work can only be performed by an Electrical Worker who is an authorised isolator or approved by an authorised isolator.

As part of planning the isolation, the Electrical Worker who is an authorised isolator shall positively identify the Isolation Point or points of the equipment being worked on, by referring to site documentation and confirm the isolation by:

- consulting with the person in control of the Electrical Equipment
- utilising knowledge from training and/or experience.

If no site documentation is available, the Electrical Worker shall positively identify the isolation by:

- consulting with the person in control of the Electrical Equipment
- utilising knowledge from training and/or experience.

Additional non-positive isolations may be performed to further safeguard Electrical Workers from inadvertent equipment operation e.g. the removal of circuit control fuses from a motor starter. In some cases, there may also be two sources of supply, multi voltage types, back feeds, solar power feeds or incorrect isolation of supply. Testing stored voltage sources such as variable speed drives or capacitor banks involve additional risk and particular care should be taken when isolating and discharging stored voltage sources.

All Electrical Work shall be recorded in CIS and a Certificate of Testing and Compliance shall be provided by external contractors for all Electrical Work performed at Seqwater workplaces.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 11 of 65 |

5.2.6. Completing Electrical Work

Electrical Equipment that has been de-energised must be re-energised through a controlled process in accordance with the Energy Tag and Lockout Procedure ([PRO-00014](#)), the relevant isolation plan, and must not be inadvertently re-energised.

When re-energising equipment, the Electrical Worker must inform other workers and/or the person in control of equipment that the equipment is about to be re-energised in accordance with the requirements of the Energy Tag and Lockout Procedure ([PRO-00014](#)).

5.3. Electrical tools, test equipment and safety

5.3.1. Electrical tools

At a minimum, the tools required to perform Electrical Work shall be insulated and rated at the voltages being applied to the tool (e.g. voltage indicators on the tool with fuse protection to prevent short circuits). When selecting electrical tools, the following must be considered:

- the device’s function, range and class of accuracy must be appropriate to both the Electrical Work and the conditions where the work is being undertaken
- electrical test equipment shall be verified as working and safe for use before and after testing of the Electrical Equipment
- to confirm electrical safety, the combination of leads and instruments used shall be capable of withstanding the impulse voltages and fault current levels that could be experienced at the location
- the rating for test instruments and test probes used on 415/240V mains voltage equipment connected on the supply side of a main switchboard shall be Installation Category III (3) or IV (4)
- Type A probes (leads) should be used for measuring supply voltages (415/240 V AC). Therefore, workers who perform Live testing or fault finding in switchboards shall use at least Category III (3) devices with Type A probes.

5.3.2. Electrical safety equipment

Each item of electrical safety equipment must be tested every 6 months. Items that pass the test are to be tagged with the next test date and returned to service. Any item that does not pass the test must be removed from service. After repair, an item must be tested and tagged before being returned to service.

Whenever an item of equipment is tested by an external organisation a written test report must be provided. The report must include details of the test methods used and the test results.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 12 of 65 |

| Insulating Mats | Insulating Gloves | LVR rescue kits |
|---|---|--|
| <p>Insulating mats shall be inspected every six months by an approved testing facility and tested in accordance with AS/NZS 2978 – <i>Insulating Mats for Electrical Purposes</i>. Mats are to be washed with soap and water, stretched and examined for the following</p> <ul style="list-style-type: none"> • Blisters, cracks, cuts or holes • Embedded foreign matter • Defective fastenings | <p>Low Voltage work shall be Class 00 and shall be Class 0 for High Voltage Isolation and access.</p> <ul style="list-style-type: none"> • Inspected and tested every 6 months by an approved testing facility in accordance with AS 2225 – <i>Insulating Gloves for Electrical Purposes</i> • Replaced every 6 months. <p>Damaged or faulty insulated gloves must be appropriately disposed of and not used for Electrical Work.</p> | <p>A Low Voltage rescue kit shall be inspected every six months by an approved testing facility and shall contain the following equipment:</p> <ul style="list-style-type: none"> • Insulated crook • Insulating gloves • ‘Isolate Here in Emergency’ sign • Burn dressings • Fire blanket • Torch |

Consideration should also be given to bringing a defibrillator to the work area. If a risk assessment or the SWMS determines a spotter is required, a defibrillator must be brought to the work area.

5.3.3. Electrical test equipment

For the purposes of this section, electrical test equipment includes any item of equipment used to test or otherwise determine the status of an electrical item. An electrical test equipment register must be maintained for all electrical test equipment at each workplace where Seqwater Electrical Workers are based.

5.3.4. General requirements

Test instruments that are to be used or connected to Electrical Equipment should be suitable and fit for purpose, in a good working condition, provide suitable protection against hazards arising from over-voltages and have suitably insulated leads and connection probes to minimise risks to the Electrical Worker

5.3.5. Testing, Calibration and Inspection

| Testing | Calibration | Inspection |
|--|---|---|
| <ul style="list-style-type: none"> • Testing of electrical test equipment is to be undertaken every six months. • Test results are to be recorded within the electrical test equipment register. • Test equipment used for testing on Low Voltage circuitry shall be tested to 1000 volts AC and 1500 volts DC. | <ul style="list-style-type: none"> • Calibration of electrical test equipment is to be undertaken in accordance with manufacturers’ requirements for each type of test equipment used, or every 12 months – whichever is the shorter. • Calibration results are to be recorded within the electrical test equipment register. | <ul style="list-style-type: none"> • Prior to each use, electrical test equipment (including associated leads, clips, sockets, probes) are to be inspected for any damage to insulation. • Each electrical test instrument is to have a durable sticker placed on it to indicate that it has been tested. • The sticker is to contain information about who performed the test and when the next testing is due. |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 13 of 65 |

5.4. Electrical Equipment

5.4.1. Electrical switchboards

The following is to be applied to switchboards located at Seqwater workplaces:

- All electrical switchboards must be kept free of obstructions and the doors kept locked (this should be included in the relevant workplace inspection checklist). Where opening the switchboard would provide immediate exposure to Live parts, the switchboards must be locked (or require a tool to open) and signed 'Live Parts Enclosed'
- Electrical switchboards should be labelled or signed to warn of the level of electrical hazard, or otherwise. The 3 labels that should be used are:
 - Danger, Exposed Electrical Parts, Authorised Access Only
 - Danger, High Voltage, Authorised Access Only
 - Extra Low Voltage, No Live exposed Electrical Equipment
- A minimum clearance zone of 600mm from an open switchboard door must be allowed in front of a switchboard and may be clearly indicated with yellow painted lines on the floor
- Where possible, protection from vehicle damage should be implemented
- Periodic inspections of switchboards by an Electrical Worker to provide scheduled maintenance (which may include advice on conducting thermo scans) and tests on switchboards in accordance with the applicable maintenance program
- Plans and drawings may only be stored inside a switchboard where appropriate storage compartments are available
- Spare parts and equipment must not be stored inside a switchboard if they have the potential to introduce hazards to the switchboard (i.e. remove parts from boxes to eliminate fire hazard, secure or store so that they do not cause hazards from falling onto workers, etc.).

5.4.2. Opening switchboards with immediate exposure to Live parts

If there is a requirement to open an escutcheon panel, or switchboard that will provide immediate exposure to Live parts, a SWMS or approved Standard Operating Procedure (SOP) must be used. Due to the risk of being exposed to Live electrical parts only Authorised Personnel are permitted to open a switchboard or escutcheon panel.

Authorised Personnel are considered to be:

- Electrical Workers or
- Electrical Engineers that have been included on the Electrical Worker Register.

In addition, non-Electrical Workers may also access Control Systems boards or enclosures where the switchboard has undergone an assessment by an Electrical Worker to confirm that:

- Low Voltage and Extra Low Voltage circuits are separated physically as much as possible and insulated as required by AS/NZS 3000; and



| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 14 of 65 |

- insulation and barriers, enclosures and shrouding meets (IP2X) protection from contact with High Voltage Live parts provided by either an electrical protection barrier or an enclosure and tested using a Jointed Test Finger (IPXXB)

5.4.3. Generators

All generators for use at Seqwater workplaces must comply with the requirements of Seqwater’s Electrical Design and Construction Standard (E-SPE-STD-001), in particular section 5.3 – Generator Starter Batteries.

5.4.3.1. Fixed generators

Fixed generators used to provide backup electrical supply to Seqwater assets must comply with the requirements of AS 3010 Electrical Installations – Generating Sets. In addition, the installation of fixed generators may be required to comply with requirements of electricity distributors and other relevant regulatory authorities.

All fixed generator installations and associated supply Switching equipment must be designed by an appropriately qualified and RPEQ Electrical Engineer in the area of discipline.

5.4.3.2. Portable generators

Depending on generator output, portable generators used at Seqwater workplaces must comply with the requirements of AS 3010: Electrical Installations – Generating Sets.

Specialist advice shall be sought from an appropriately qualified Electrical Worker to identify the correct safety protection before using portable generators on Seqwater workplaces and if required, install a temporary earth that is confirmed by testing the earth resistance.

When using portable generators at Seqwater workplaces, the user of the generator must understand the electrical safety requirements associated with the generator, the purpose for which it is being used and that adequate risk controls are implemented and managed.

When connecting a portable generator to a facility (i.e. pump station, water treatment plant) via a ‘plug and play’ configuration, the following must be considered:

- an interlock system must be installed to prevent incorrect connections being made
- a detailed work instruction and SWMS have been developed to detail the connection process
- workers must be trained and competent in performing the connection activities and in the operation of the portable generator.

Any connection of a portable generator to a Seqwater facility where the connection is made directly into a switchboard using cable tails or lugs must only be undertaken by an Electrical Worker.

No other appliances shall be connected to a portable generator whilst it is connected to an Seqwater facility.

When identifying appropriate risk controls for the use of portable generators at Seqwater workplaces, the following must be considered:

- Where a generator is directly supplying a site switchboard, all sub-mains and final sub-circuits shall be protected by an RCD and earth electrode.
- Isolated winding generators shall only be used on construction or demolition sites with the following conditions:

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 15 of 65 |

- Each winding shall supply not more than one item of Class 1 (Earthed conductive parts) Electrical Equipment
- One or more items of Class II (double insulated) Electrical Equipment may be connected to an isolated winding generator
- Portable RCDs shall not be the source of electrical protection for workers as they will not operate as there is no neutral to earth connection upstream of the RCD
- Two pole Switching must be implemented as both conductors are considered to be Live
- The connection of the generating set bonding system to the general mass of earth through an earth electrode is not required or recommended as there is double insulation from the Live parts to the frame.
- Generators providing electrical supply via permanently connected RCDs with maximum rated residual current of 30 mA, operating in all Live (active and neutral) conductors, may be used to supply multiple items of equipment under the following conditions:
 - The RCD protected system allows the use of multiple Class I (metal frame with a bonding conductor) items as the first fault causes a residual current device to trip
 - The connection of the generating set bonding system to the general mass of earth through an earth electrode is not required or recommended.

5.4.4. Cathodic protection systems

All cathodic protection systems installed and operated at Seqwater workplaces must comply with the requirements of AS 2832:3 Cathodic Protection of Metals – Immersed Structures and AS 2832.4: Cathodic Protection of Metals – Internal Surfaces.

Additional requirements for the design, installation and operation of cathodic protection systems are defined in the *Work Health and Safety Regulation (Qld)* and the Safe Work with Plant Procedure ([PRO-00867](#)).

5.4.5. Asbestos or Asbestos Containing Material

Workers are prohibited from undertaking work on a switchboard or any other Electrical Equipment if the work has the potential to disturb asbestos or Asbestos Containing Material (ACM). Refer to the Asbestos Management Procedure ([PRO-01752](#)) for further information.

5.5. Electrical Exclusion Zones

When performing work, no person, plant or thing can come within an exclusion zone. A person includes any article of clothing worn by the person, and any conductive object the person is handling.

Electrical Exclusion Zones are minimum safe distances that must be maintained from Live electrical parts. The Exclusion Zones apply to people, operating plant and vehicles, and extend in all directions, not just sideways. The exclusion zone distance is dependent on the following:

- the type of electric part (e.g. exposed part or overhead) – the voltage present (e.g. 240V or 33kV)
- the qualification / competency of the worker
- the type of activity (e.g. operating plant or vehicle).

Supervisors at Seqwater workplaces must identify an electrical exclusion zone and communicate this exclusion zone to all workers e.g. signs/barriers as detailed in the SWMS.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 16 of 65 |

5.5.1. Exclusion Zones for electrical parts

When working near energised electrical parts (not including working near overhead electrical lines), the risk management procedures in part 4.1 of this Procedure should be followed.

5.5.2. Overhead electrical lines Exclusion Zones

Exclusion Zones associated with overhead electrical lines are listed in Schedule 2 of the *Electrical Safety Regulation* (Qld). This includes the following Exclusion Zones set for an Untrained Person operating plant in proximity to overhead uninsulated (exposed) electric lines:

| Voltage (nominal phase voltage of uninsulated electric line) | Minimum exclusion zone for plant |
|---|---|
| Voltage up to 132kV | 3m |
| Above 132kV up to 330kV | 6m |
| Above 330kV up to 500kV | 8m |

Exclusion Zones set for an Untrained Person may be reduced subject to additional controls, including specific training and authorisation of plant operators and prior consultation with the relevant electrical supply authority. Refer to the *Electrical safety code of practice – Working near overhead and underground electric lines (Qld)* for further detail.

5.5.3. Restrictions for working near overhead electric lines

Work within an electrical exclusion must be avoided so far as it is reasonably practicable.

Seqwater employees are prohibited from undertaking work on overhead electrical lines. Work on overhead electrical lines is performed by suitably qualified contractors.

The following restrictions apply to working near overhead electrical lines:

- No person or item of plant on a Seqwater controlled workplace, is to enter the electrical exclusion zone for overhead electric lines set for an Untrained Person, unless:
 - there is evidence of consultation with the relevant electrical supply authority; and
 - the worker is an ‘Authorised Person’ or an ‘Instructed Person’; and
 - a HSWMS Deviation Approval Form ([FRM-00795](#)) has been endorsed by the Manager, HSW and approved by the relevant General Manager.
- For any site controlled by a Principal Contractor, work must not be conducted within an electrical exclusion zone set for an Untrained Person without prior evidence of consultation with the owner of the electrical asset and prior written permission being received from a senior officer of the Principal Contractor. The Manager, HSQ and the relevant General Manager must be notified prior to the commencement of the work within the exclusion zone.
- A trained Safety Observer/spotter (Refer to Appendix B for Safety Observer requirements) must be used when there is a risk of workers or item of plant entering an exclusion zone for overhead electric lines. Where a Safety Observer is used, workers must comply with the following conditions:
 - the Safety Observer should not be required to carry out any other duty during the time they are carrying out duties as a Safety Observer

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 17 of 65 |

- be competent in observing, warning and communicating effectively (this may mean the use of electronic communications e.g. a two-way radio)
- be aware of the electrical hazards and risks associated with the work
- be able to warn about the approach to electrical apparatus
- be able to stop the work if necessary
- not be expected to observe more than one crane or plant at a time
- not be located in an elevated work platform
- the Safety Observer must mark the border of the exclusion zone with suitable markers e.g. red warning tapes or paint, which can easily be viewed by the machine operator and any other workers involved in the work.

5.5.4. Risk assessment

A risk assessment must be completed for all work occurring near overhead electric lines. This should consider:

- the location, height, arrangement and visibility of overhead electric lines and supporting structures like poles, towers and stay wires
- the voltage of electric lines and exposed energised parts and whether electric lines and parts are insulated or bare
- possible sway or sag of the electric line caused by wind or temperature changes
- weather conditions like storm activity, heavy rain or lightning
- site conditions including:
 - prevailing or unexpected winds their strength and direction
 - the terrain and possibility of unexpected ground surface movement under plant
 - vehicular traffic, pedestrians or Livestock that could interfere with the work.
- the type of plant and machinery required including:
 - their design envelope, inherent stability and that of a suspended load
 - their dimensions and their operating characteristics, ease of manoeuvrability and conductivity if they are Earthed
 - the minimum clearance distances from the closest part of the plant to electric lines
 - the possibility they may become energised by proximity to High Voltage lines.
- nature, size and shape of loads to be moved include:
 - load stability, dimensions and surface area facing the wind
 - whether loads are conductive - all materials should be treated as such unless a Competent Person (electrical) person can confirm otherwise
 - non-conductive material may become conductive when in contact with High Voltage material
 - how loads are secured and if any part of the load may move and enter within an unsafe distance
 - whether loads being carried above electric lines may accidentally fall onto them e.g. when moving a swimming pool from the street over energised electric lines into the yard of a home
- the type of work activities required and the frequency of the work tasks
- qualifications, competency, skill and experience of the people doing the work
- setting up and packing up processes
- work practices and procedures.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 18 of 65 |

5.5.5. Risk controls

The risk of working near overhead electrical lines must be eliminated so far as is reasonably practicable. This may be done by contacting the relevant electricity supply authority to request that the powerlines be de-energised or re-routed away from the work area. Verification of any de-energisation must be demonstrated and confirmation received in writing from the relevant electricity supply authority before commencing work.

The following are potential controls when working near overhead electrical lines:

| Hierarchy of control <i>In order of preference if elimination of the hazard is not practicable</i> |
|---|
| <p>Substitution controls:</p> <ul style="list-style-type: none"> Using alternative plant which cannot enter an exclusion zone Using non-conductive tools designed to reduce the possibility of direct contact with the overhead electric line Using ultrasonic measuring devices instead of the mechanical types for measuring heights of overhead lines. |
| <p>Isolation Controls:</p> <ul style="list-style-type: none"> Erecting a physical barrier, made from non-conductive material, to prevent a person, anything held by a person, or any part of an item of plant or equipment entering an exclusion zone. |
| <p>Engineering Controls:</p> <ul style="list-style-type: none"> Limiting movement of plant with mechanical stops Fitting plant with programmable zone limiting devices Mechanically limiting slew speed of a crane to slow using electrically insulated plant and equipment Fitting vehicles/plant with earthing devices as required by legislation or the electricity supply authority. |
| <p>Administrative Controls:</p> <ul style="list-style-type: none"> Fitting proximity sensors and a warning device to plant to alert operators when they are about to enter Exclusion Zones Making hazard more visible by using warning signs to indicate the location of overhead electric lines and defined work areas Arranging for the electricity supply authority to fit overhead lines with approved visual indicators such as tiger tails Managing and supervising the work to confirm safe work practices, including compliance with SWMS and Exclusion Zones. Bringing a defibrillator to work area for immediate mitigation of injury |
| <p>Personal Protective Equipment (PPE):</p> <ul style="list-style-type: none"> Insulating gloves Electrical non-conductive safety footwear Safety helmets Standing on an insulating mat Appropriately rated arc flash PPE |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 19 of 65 |

5.6. Working near underground electrical services

Where Electrical Work requires excavation and trenching to access the electrical service, or there is a requirement to drive an object into the ground, the requirements of the Excavation, Trenching and Penetrations Procedure ([PRO-00302](#)) and Electrical safety Code of Practice 2020 must be complied with.

5.7. Electrical testing and tagging

Users of Electrical Equipment are responsible for confirming the equipment is tested and tagged before the equipment is used. Any equipment that has not been tested or is out of test date must not be used until it has been successfully tested and tagged.

All Electrical Equipment and RCD's must be tested and tagged. This includes the operational testing (manual) and the performance testing (electrical) of all RCDs.

Specific requirements for inspection, testing and tagging of Electrical Equipment at Seqwater workplaces are included in Appendix C of this Procedure.

The inspection, test and tag process shall be undertaken in accordance with the requirements of *AS/NZS 3760 In-service Safety Inspection and Testing of Electrical Equipment*.

The following tag colours are used at Seqwater:

| Month/Frequency | Colour of Tag |
|-----------------|---------------|
| January – June | White Tag |
| July – December | Orange Tag |
| Annual | Black Tag |
| Five Years | Burgundy Tag |

In accordance with *AS/NZS 3760: In-service safety inspection and testing of Electrical Equipment*, requirements for testing and tagging do not apply to Electrical Equipment (such as suspended light fittings), installed at a height of 2.5m or greater above the ground, floor or platform, where there is not a reasonable chance of a person touching the equipment and, at the same time, coming into contact with earth or a conducting medium which may be in electrical contact with earth or through which a circuit may be completed to earth.

In addition, the standard allows that, any new equipment procured by Seqwater's ICT Team may initially be tagged by an ICT Team member with a burgundy tag after the equipment has been inspected to check it is not damaged.

This tag must include:

- wording "new to service"
- date of entry to service
- date when next test is due
- statement "this appliance has not been tested in accordance with AS/NZS 3760"
- ICT workers authorisation number

The ICT team has trained and authorised people to test ICT related equipment in the offices only and any other equipment will be deferred to an Electrical Worker. ICT equipment will require testing and tagging 5 years after the date of entry to service.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 20 of 65 |

A register of all Electrical Equipment shall be maintained for each workplace. This registered must record all operational testing (manual) and performance testing (electrical) of all Electrical Equipment and fixed RCDs.

6. Live Low Voltage Electrical Work

This section defines the requirements for Competent Persons to perform Live Low Voltage Electrical Work on Electrical Installations or equipment at Seqwater workplaces. The requirements in this section are in addition to the general electrical safety requirements outlined in Section 4 of this Procedure.

Live Electrical Work must not be carried out unless:

- it is necessary in the interests of health and safety that the Electrical Work is carried out while the equipment is energised (e.g. it may be necessary for life-saving equipment to remain energised and operating while Electrical Work is carried out on the equipment)
- it is necessary that the Electrical Equipment to be worked on is energised in order for the work to be carried out properly
- it is necessary for the purposes of testing to ensure the equipment is de-energised as required by Electrical Safety Regulation section 15
- there is no reasonable alternative means of carrying out the work.

Where energised Electrical Work is carried out, it must be performed by a Competent Person:

- who has tools, testing equipment and PPE that are suitable for the work and have been properly tested and maintained in good working order
- in accordance with a safe work method statement and prepared for the work
- 'risk assessment shows there is no serious risk associated with the proposed work

6.1. Preparation of workers, PPE and test equipment

In addition to the general electrical safety requirements, the following actions must be undertaken prior to performing Live electrical fault finding:

- a person with electrical competency must undertake a risk assessment prior to undertaking any Live Electrical Work. The results of the risk assessment and the identified risk controls must be documented in a SWMS specific to the work activity being undertaken, which must:
 - identify the Electrical Work;
 - specify hazards associated with the Electrical Work and risks associated with those hazards;
 - describe the measures to be implemented to control the risks; and
 - describe how the measures to be implemented to control the risks are to be implemented, monitored and reviewed.
- Electrical Workers must remove any metal rings, bracelets, watches that may have the potential to come in contact with an electrical part;
- where a risk assessment indicates that the Live Electrical Work should be undertaken by two Competent Persons, the Competent Person performing the Live electrical fault-finding work must confirm that an electrical Safety Observer is in place for the duration of the Live electrical fault-finding work;

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 21 of 65 |

- the Competent Person performing the Live electrical fault-finding work must place an in-test 1000V Low Voltage rescue kit adjacent to the area they will be working and that all parts of the kit are checked prior to work commencing;
- where a risk assessment indicates that the Live Electrical Work should be undertaken by two Competent Persons, the Competent Person undertaking the Live Electrical Work must instruct the electrical Safety Observer where the point of isolation is located and the method of operation of the switch. The tag from the rescue kit must be attached to this point of isolation before work commences;
- an electrical safety mat shall be placed on the ground where the Competent Person shall be standing;
- barriers must be erected to prevent unauthorised workers from entering the area where Live Electrical Work is being undertaken;
- the minimum requirement for PPE when performing energised Electrical Work are:
 - approved full-length flame-resistant clothing
 - safety glasses or face-shield (determined by risk assessment)
 - Electrical Worker gloves insulated to the highest potential voltage expected for the work being undertaken
 - Low Voltage rescue kit
 - electrical safety mat
 - electrical non-conductive safety footwear.
 - If spotter/second person for LV rescue is required according to risk assessment, a defibrillator must be brought to work area prior to commencement of work.

A guide to the selection of PPE suitable for the type of work near operating currents is provided in Appendix F (an extract from *AS/NZS 4836 Safe working on or near Low Voltage Electrical Installations*) of this Procedure.

All electrical test equipment used when performing Live electrical fault finding must be insulated and rated for the voltages that will be applied to the tool e.g. electrical test equipment with voltage indicators and fuse protection to prevent short circuits.

When selecting electrical test equipment for use in Live electrical fault finding, the following must be considered:

- the device’s function, range and class of accuracy shall be appropriate to both the work being undertaken and the conditions in which the work is being undertaken
- the combination of leads and instruments used should be capable of withstanding the impulse voltages and fault current levels that could be experienced at the location
- the rating for test instruments and test probes used on 415/240V mains voltage equipment should be Installation Category III (3) or IV (4)
- Type A probes (leads) should be used for measuring supply voltages (415/240 V AC). Therefore, workers who perform Live testing or fault finding in switchboards should use at least Category III (3) devices with Type A probes.

When selecting PPE and test equipment during the risk management process, consideration will need to be given to current industry practice as well as any advancement in technology that will protect workers from injury.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 22 of 65 |

7. Performing Live electrical fault-finding work

De-energised testing methods should be used before energised testing methods. The LV Energised fault-finding SWMS must be completed before any Live electrical fault-finding work is performed. This is not required when testing for dead.

Any electrical parts not required to be energised during the Live electrical fault-finding work must be isolated prior to commencing the work. All Electrical Isolations must be undertaken in accordance with the Energy Tag and Lockout Procedure ([PRO-00014](#)). If isolation is unable to be performed, any Live parts not required for work shall be isolated by means of a non-conductive barrier or insulation material.

No electrical part shall come into contact with any part of the Electrical Worker unless it is tested and proven isolated with appropriate test equipment that has been verified as working before and after the testing of the electrical part.

7.1. Completing Live electrical fault-finding work

After Electrical Work is completed, all persons, tools and equipment shall be removed from the work area.

Any equipment not able to be put back into service shall be isolated from the supply by means of tags and locks or removal of the cable from the supply in accordance with the Energy Tag and Lockout Procedure ([PRO-00014](#)). All cables not connected at the completion of work shall be terminated with appropriate connectors. No bare conductors shall be present when work is complete.

When testing or fault finding is completed, restore circuits and equipment to a safe condition. For example, disconnected conductors should be reconnected and left in a safe state with covers replaced and accessories and equipment properly secured.

Equipment placed back into service shall be checked it is functioning correctly.

8. High Voltage Requirements

8.1. High Voltage access requirements

Specific requirements for HV access and inspections at Seqwater workplaces are defined in Appendix E of this document.

Seqwater employees are prohibited from undertaking Live High Voltage Electrical Work. Live High Voltage Electrical Work will be performed by suitably qualified contractors.

This Procedure, including the site based High Voltage installation line diagrams and manuals constitute Seqwater's HV Installation Safety Management Plan refer to Appendix H and to the Electrical safety code of practice 2021 – Managing electrical risks in the workplace (Qld) for further information.

8.1.1. PPE requirements

All persons working on or in the vicinity of electrical apparatus subject to a HV Permit shall be clothed in an appropriate manner for protection against possible exposure to electrical shock, electrical flash or other injuries.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 23 of 65 |

Any rings, metal watches, body piercing, bracelets or jewellery shall be removed prior to operating any HV equipment.

The minimum PPE requirements for undertaking HV work are:

- approved full-length flame-resistant clothing (Cat 4 PPE for High Voltage Electrical Work)
- approved footwear (safety boots)
- approved hearing protection

In addition, when working with specific HV apparatus (i.e. Switching, racking circuit breakers, applying and removing Earths or using voltage test equipment) workers must wear the following PPE:

- safety helmet with incorporated face shield or a full-face shield
- in-test approved electrical gloves insulated to the highest potential voltage expected for the work being undertaken

Additional tools and PPE may be required dependant on the risks identified in the risk assessment undertaken for the task.

8.1.2. HV Exclusion Zones

Untrained Persons shall not encroach inside the HV exclusion zone. Specifications of HV Exclusion Zones are defined in Schedule 2 of the *Electrical Safety Regulation (Qld)* or the *Electrical safety code of practice 2021 – Managing electrical risks in the workplace (Qld)*. Refer to the definitions for HV Exclusion Zones to 33 KV, HV test equipment.

8.1.3. HV Testing Equipment

All HV test equipment (HV tester e.g. Modiewark) used to confirm the absence of voltage potential on HV conductors must be tested (in date and free from damage) and confirmed to be operational immediately prior to and immediately after testing the HV conductor required to be Earthed. Operational testing of HV test equipment must be conducted using the manufacturer’s instructions specific to the test equipment being used. All required PPE must be worn while using HV test equipment.

The HV conductor being tested to prove de-energised by the HV test equipment must be treated as Live until the test proves that the HV conductor is de-energised and the HV test equipment has been proven to be operational prior to and immediately after testing the HV conductor.

If the HV test equipment fails either of the operational check tests, then the HV conductor being tested shall be treated as Live.

HV test equipment, including HV testers e.g. Modiewark, shall be tested by an approved test facility every six months. Testing shall include insulation testing and calibration. Test sticks shall only be used to test for voltages for which the test stick was designed.

All HV test equipment shall be tested in accordance with the *Electrical Safety Regulation (Qld)* and the *Electrical safety code of practice – Managing electrical risks in the workplace (Qld)*.

All HV test equipment shall be labelled after being tested. The label shall include the name of the organisation that conducted the test and the next due date for testing. Records of test of HV testing equipment shall be kept for a period of at least five years.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 24 of 65 |

Portable earthing devices shall be tested on a six-monthly basis to confirm they are in good condition and capable of withstanding the fault currents that may be expected. A tag shall be placed on the earth to indicate the next due date for testing.

8.1.4. Second worker

A minimum of two workers must be present when undertaking HV isolation and earthing operations. As a minimum, one of the workers must be qualified as a Switching Operator and the second worker must be qualified as a Switching Assistant. It is preferable that both workers involved in HV operations be qualified as Switching Operators.

Where after hours work is required, a Switching Coordinator may perform the role of Switching Coordinator and Switching Operator Assistant. Under no circumstance can a Switching Coordinator also perform the role of Switching Operator.

8.1.5. HV accreditation and authorisation

Seqwater must confirm that all workers required to perform work activities involving HV electricity are assessed as competent before providing authorisation to undertake any HV work. Only Competent Persons who have attained the competency required to perform their role are permitted to work on high-voltage Electrical Equipment. The following HV competencies apply to HV work.

- Operate Primary HV Switchgear
- Develop HV Switching Programs
- Co-ordinate HV Switching Programs
- Operate HV Secondary Switchgear.

The duration of validity for all HV authorisations is:

- Switching Coordinator, two years
- Switching Operator, two years
- Switching Assistant, two years.

Seqwater must reassess the competence of workers to perform HV work before renewing their HV authorisation. The High Voltage ReAuthorisation Form ([FRM-00629](#)) must be used to reassess worker authorisations.

After 2 years from the initial accreditation, the HV Authorised Worker must undergo formal reaccreditation/refresher training from a recognised training provider to a national competency level.

Competency based training in local area systems must be provided for new workers before they participate in any HV work and will be recorded in Our Learning.

8.2. Preparation for HV work

Prior to any High Voltage Switching Sheets ([FRM-00438](#)) being prepared, the worker/s requiring access to the Electrical Equipment shall discuss the task requirements with the Switching Coordinator and Operator to confirm that the scope of work is understood and all safety and operational requirements have been met. For example:

- Can the Switching be done remotely, or will Electrical Workers have to manually perform the Switching?
- if remote Switching cannot be performed is the incident energy, approach distance, Arc Flash boundary known or can it be assessed?
- Are confined spaces being entered?

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 25 of 65 |

- Has required PPE and other equipment been tested recently to statutory requirements?
- What is the planned outage for the equipment?
- What test certificates are required to be issued for the completed work?
- Have necessary approvals, as documented in section 5.5.2, been obtained if work is required within an overhead electrical line electrical exclusion zone?
- Are workers and/or service providers competent for the task and have appropriate work licences and approvals to come into an electrical part exclusion zone?
- Is the HV emergency response plan in place?
- Has the person in control of the Electrical Equipment been consulted?

Once these issues have been addressed, preparation of HV Switching Sheets and High Voltage Access Permit Form ([FRM-00439](#)) may proceed. The HV Switching Sheet is a step by step isolation instruction which interfaces with the Isolation Instruction in the Energy Tag and Lockout Procedure ([PRO-00014](#)) which also must be strictly followed.

The Access Permit Recipient must check that workers not involved in the HV work activity defined on the Access Permit do not enter the HV work area. Signs, barriers, caution tape or other visual warning devices may be used to restrict access.

Access to HV switch room access must be restricted. Only authorised workers approved and accompanied by a Switching Operator may enter a HV switch room.

Prior to undertaking any HV work that involves applying a potentially fatal test current, the HV Test Permit ([FRM-00949](#)) Recipient must check that barriers, tapes, signs and/or visual warning devices are in place to restrict access to the HV work area.

The process for securing access to HV equipment is defined in the flowchart included in Appendix D of this Procedure.

The requirements for HV isolation and access are defined in tables 1 and 2 of Appendix E of this Procedure.

8.2.1. Determine the requirement for High Voltage access

The Switching Operator must determine the extent of work to be performed in the vicinity of HV lines or apparatus. Where work activities impinge on HV Exclusion Zones, HV isolations will be required. The Switching Operator must confirm the amount of isolation required to provide sufficient clearance from the HV lines and apparatus to enable safe access. This includes earthing if Untrained Persons could encroach on the exclusion zone.

8.2.2. Select and prepare the appropriate Switching Sheet

The Switching Operator must review all pre-drafted Switching Sheets to determine if the sheets provide HV isolation to meet the requirements of the work to be performed. In doing so the relevant High Voltage Single Line Diagrams must be reviewed.

If no pre-drafted Switching Sheet is available, the Switching Operator must complete a new Switching Sheet to provide the necessary isolation. As a minimum, a single line HV diagram (which is confirmed to be accurate) must be used to determine the most suitable isolation and earthing method. The process for preparing and undertaking the HV Switching Sheet are define in the flowchart in Appendix D of this Procedure.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 26 of 65 |

8.2.3. Review and authorise the Switching Sheet

The Switching Coordinator must review the Switching Sheet to confirm it provides sufficient isolation for the Work Group to safely access the HV work area.

The Switching Coordinator must issue the Switching Sheet with a unique number, prefixed by the site identification number to the Switching Operator (e.g. TWB xx/xx/13 PU03 – West Bank Water Treatment Plant Date Equipment Number TWB101212PU03).

The unique number and issue date must be recorded on the Switching Sheet log. The Switching Operator and Switching Coordinator cannot perform the same role on each Switching Sheet.

8.2.4. Positive identification of equipment to be isolated

Prior to Forward Switching and isolation of HV equipment, the Switching Operator and Switching Assistant must positively identify the HV equipment being accessed.

The identification of equipment must be undertaken by visually sighting the equipment being isolated and checking that any attached identification labels match the equipment and the items on the Switching Sheet and the High Voltage Single Line Diagram.

Any inconsistencies with equipment identification must be referred to the Switching Coordinator for clarification prior to commencement of Switching. Any changes resulting from the identified inconsistency must be updated on the Switching Sheet and noted on the HV Single Line Diagram and a hazard notification should be raised.

8.2.5. Approve commencement of Forward Switching

The Switching Coordinator must approve the commencement of the Forward Switching in accordance with the Switching Sheet.

Consideration of the security of supply to the remainder of the workplace and to any other Switching that may already have been performed on the High Voltage system, must be considered before any Forward Switching is undertaken.

8.3. High Voltage Isolation and Earthing

8.3.1. Isolation

The Switching Operator must carry out Forward Switching in accordance with and in the order indicated in the Switching Sheet. All Switching must be performed in the presence of a Switching Assistant.

The Switching Operator will carry out all Switching operations whilst the Switching Assistant reads aloud the items on the Switching Sheet. The Switching Assistant observes the Switch Operator carrying out the Switching operations to confirm the apparatus is operated in the correct and approved manner.

Any inconsistencies with Switching order or logic must be referred to the Switching Coordinator for clarification. Do Not Operate Isolation Tags must be attached to the points of isolation and earthing points.

Operation and/or actions on the Switching Sheet must be checked off as they are completed with the time and date noted and initialled by the Switching Assistant.

While it is preferable to have the same Switching, Operator carry out the forward and Reverse Switching, this may not be possible due to worker availability and the duration of the HV access. Where the Switching Operator who

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 27 of 65 |

performed the forward isolations is not available, another similarly qualified Switching Operator may perform the Reverse Switching when required.

The Work Group must install Working Earths where there is a need for additional earthing on the HV apparatus. These Working Earths must be recorded on the permit when applied and also recorded when they are removed.

Working Earths are applied and removed under the control of the HV Access Permit or HV Test Permit Recipient.

8.3.2. Confirm isolations

The Switching Operator must confirm that an adequate visible break exists between the High Voltage supply and the apparatus requiring access, so that lightning or Switching surges do not cross the Isolation Point.

All Isolation Points must be identified by a Do Not Operate / Isolation Tag and be locked in the de-energised or safe position in accordance with the Energy Tag and Lockout Procedure ([PRO-00014](#)).

8.3.3. Earthing

The purpose of earthing HV Electrical Equipment is to:

- enable protection equipment to operate and to limit the rise in potential difference at the HV work area, in the event that supply is inadvertently restored
- safely discharge induced or residual voltage.

Prior to undertaking HV operator earthing, the Switching Operator must complete a Switching Sheet for the Electrical Work. The following should be used as a guide to undertake HV operator earthing activities:

- HV operator earthing shall only be applied as part of an approved Switching Sheet
- HV Working Earths shall be applied or removed under the control of a HV Access Permit or the HV Test Permit
- no other reason is acceptable to carry out HV earthing on unearthed equipment.

Where possible or practicable (providing this does not introduce a hazardous situation) the Switching Operator must prove that the electrical apparatus is de-energised at the proposed point of application of Earths.

All phases must be proved de-energised using an approved voltage detector before Earths are applied. Correct operation of the voltage detector must be verified immediately before and immediately after proving de-energised.

Where the design of an electrical apparatus does not allow the testing to prove de-energised, an electrical apparatus with fault make earthing capability must be used after first checking other voltage or mechanical indicating devices that the electrical apparatus is de-energised.

8.3.4. Identification of apparatus to be Earthed

A HV Single Line Diagram shall be available for all HV installations at Seqwater workplaces.

The apparatus to be Earthed must be positively identified by the Switching Operator using the instructions on the Switching Sheet and the HV Single Line Diagram. Where required, additional sources of information (e.g. experienced Electrical Workers, site piping and instrument diagrams, etc.), may be required to positively identify the apparatus to be Earthed.

8.3.5. Operator Earths

The Switching Operator must connect Earths to HV conductors at location/s that will enable the work area to be de-energised in the shortest possible time in the event of inadvertent re-energisation.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 28 of 65 |

Operator Earths must be applied to confirm electrical apparatus in the HV work area are Earthed prior to the issue of an Access Permit or Test Permit.

The Switching Operator must check that an operator earth is clearly identified by the attachment of an Isolation Tag and lock in a prominent position.

For a set of three-phase portable Earths (trifurcated earth), one DNOB/Isolation Tag must be attached at the point of common connection of the three phases of the portable Earths to the earth tail.

For single-phase Earths, a DNOB/Isolation Tag and lock shall be attached in a prominent position to each phase.

The following operator Earths may be used (in order of preference):

- an earthing switch
- a portable earth connected to a permanent earthing point
- a portable earth connected to an earth electrode installed in accordance with Seqwater procedures.

The earthing method used must be adequate to manage the fault current at the location and must enable protection to operate.

The placement or removal of an operator earth must only be carried out if one of the following occurs:

- under the direction of a Switching Sheet with the approval of a Switching Coordinator
- under the direction of a Recipient of a HV Test Permit
- under the direction of a Recipient of a HV Access Permit with the approval of a Switching Coordinator in accordance with these procedures.

Operator Earths applied under a HV Access Permit must remain in place as required by the HV Access Permit. If removal for testing is required, the HV Access Permit must be surrendered and a Test Permit issued in order for Earths to be lifted. The operator Earths must be replaced as soon as possible on the completion of the Electrical Work or testing involving non-lethal current.

Where possible, operator Earths associated with an Access Permit or Test Permit must be restored before an Access Permit or Test Permit is surrendered.

When restoration of operator Earths is not practical, the Recipient must obtain approval from the Switching Coordinator to leave nominated operator Earths removed.

On approval, the Recipient shall record details of all operator Earths not replaced in the abnormalities section of the Access Permit or Test Permit.

If the location of operator Earths changes or are to be changed during the course of work under an Access Permit or Test Permit, prior to operator Earths being changed, all current relevant Access Permit or Test Permits must be surrendered and cancelled, and new Access Permit or Test Permits issued to reflect the new location/s of operator Earths.

If using a circuit breaker in the closed position to earth electrical apparatus for the issue of an Access Permit or Test Permit, the circuit breaker must be made inoperable.

8.3.6. Working Earths

Working Earths are applied to limit the rise in potential difference in the HV work area and must only be applied to lines and apparatus within the Isolation Points listed on the Access Permit or Test Permit. The current-carrying

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 29 of 65 |

capacity of a working earth shall be adequate to manage the fault current at the HV work area and must enable protection to operate.

The Access Permit Recipient must coordinate the placement and removal of Working Earths, only the Recipient or an individual of the Work Group under the direction of the Recipient may place or remove Working Earths.

The placement and removal of Working Earths must be recorded on the Access Permit or Test Permit in the working earth schedule.

All Working Earths associated with an Access Permit or Test Permit must, where practical, be removed before an Access Permit or Test Permit is surrendered.

When removal of all Working Earths is not practical (for example, they are required for the subsequent issue of a new Access Permit or Test Permit), the Recipient must obtain approval from the Switching Coordinator to leave the nominated Working Earths connected.

On approval, the Recipient must record details of all Working Earths not removed in the abnormalities section of the Access Permit or Test Permit.

Where a Switching Operator identifies Working Earths are still applied in a work area and the Recipient is not on site, the Switching Operator must make all reasonable efforts to contact the Permit Recipient.

If the Recipient is not contactable, the Switching Operator must investigate the situation to confirm that no worker will be endangered by the removal of the Working Earths and request approval from the Switching Coordinator to remove these Earths.

8.3.7. Check condition of earthing leads / apparatus

The Switching Operator must check the condition of any earthing equipment and confirm it is suitable for the purpose for which it is being used, is in good condition and has been tested to confirm it is capable of carrying the prospective fault currents.

8.3.8. Application of Earths

Earths shall be applied immediately after proving that the electrical apparatus is de-energised. All de-energised phases shall be Earthed. Tail(s) of portable Earths shall be connected to a permanent earthing point before connection to the electrical apparatus.

Where a permanent earthing point is not available, the tail(s) of portable Earths may be connected to an approved earth electrode driven into the ground. The configuration of an earth electrode for HV earthing activities must be designed and approved by an appropriately qualified and experienced Electrical Engineer. Where an approved earth electrode is required to perform HV work, consideration shall be given to installing a permanent earthing point at that location for future HV work.

When undertaking HV work on overhead lines, Earths must be applied as close as practicable to any workers required to work on the isolated system. This is to provide a line of sight, where possible, for the workers to the Earths.

Where an earth switch is available to use as an earth, it is preferable to close the earth switch prior to applying or removing portable Earths.

Where a set of single-phase portable Earths is installed at the work area, all phases of the portable Earths shall be connected individually to a common earthing point.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 30 of 65 |

HV electrical apparatus must not be Earthed through fuses or circuit breakers that are designed to open/trip in the event of inadvertent energisation.

HV earthing through a circuit breaker is permissible prior to being issued with an Access Permit or Test Permit where specifically designed circuit breakers are installed. Where earthing through a circuit breaker is performed, appropriate risk control measures (i.e. energy tag and lock out) must be put in place to prevent the circuit breaker being operated.

Earths must be in place on electrical apparatus prior to and during the placement and removal of test leads. Earths must be applied with a positive action (i.e. there should be no hesitation when applying the Earths to the apparatus).

8.3.9. Attach earth to substation earth grid

The Switching Operator must connect the earth tail to an established earth prior to connection to the electrical apparatus.

When disconnecting, the Switching Operator must disconnect the tail from the electrical apparatus before the tail is disconnected from the earth. Test to prove dead.

The Switching Operator must use approved HV test equipment such as Modiewark or HV voltage tester to test the electrical apparatus to which the earth will be attached. The HV test equipment must be proved operational immediately prior to and immediately after testing the conductors.

8.4. High Voltage access

The Switching Operator must issue the Access Permit or Test Permit to the Recipient after explaining the extent of isolation, any nearby Live apparatus and the location of operator Earths.

A Test Permit can only be issued once the current Access Permit is surrendered. If, after the Test Permit is surrendered, access to High Voltage parts is required, another Access Permit must be issued.

Each Access Permit or Test Permit must be issued to a Recipient who must check that all members of the Work Group, who will approach the electrical apparatus, sign onto the Access Permit or Test Permit. If there is insufficient room for all members of the Work Group to sign onto the Access Permit or Test Permit, members may sign onto the continuation sheet providing the continuation sheet and number is noted on the Access Permit or Test Permit.

Before signing on to the Access Permit or Test Permit, all members of the Work Group must be:

- aware of their role in the Electrical Work and the tools and PPE required
- familiar with the apparatus covered by the HV Access Permit or Test Permit
- aware of all isolation and earthing points
- aware of all adjacent Live apparatus
- aware of emergency procedures.

Any worker involved in the issue or receipt of an Access Permit or Test Permit who is not satisfied with the conditions defined in the permit, may apply to the Switching Coordinator to have additional precautions implemented, either before the Access Permit or Test Permit is issued or during the Electrical Work.

The Access Permit or Test Permit is considered active once the Recipient and the Work Group have signed on to the permit.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 31 of 65 |

After the issue of an Access Permit or Test Permit, additional workers may sign on to the Access Permit or Test Permit after they have received appropriate instructions regarding the Electrical Work from the Recipient.

An issuer of an Access Permit (Switching Operator) can also be the Recipient of an Access Permit or Test Permit.

8.4.1. Workers permitted to sign on to Access Permit or Test Permit

The Recipient is responsible for ensuring that all workers signing on to an Access Permit or Test Permit are competent to perform their role in the work activity and will not pose a risk to themselves or any other members of the Work Group.

8.4.2. Rejection of a worker

A Switching Coordinator must recommend the exclusion from an Access Permit or Test Permit any worker who, at any time during the work activity, is considered unsafe as a Recipient or member of a Work Group.

Any instances of unsafe work practices must be reported to the person in control of the Electrical Equipment.

8.4.3. Issuer also a Recipient

An issuer of an Access Permit (Switching Operator) or Test Permit (Switching Operator) can also be the Recipient of an Access Permit or Test Permit.

An Access Permit and Test Permit shall not be issued for the same electrical apparatus simultaneously.

8.4.4. Temporary cessation of work or absence of Recipients

Following a cessation of work (e.g. meal breaks) or when workers have been temporarily absent from the apparatus within the limits of approach, workers shall report to the Recipient to confirm the condition of the apparatus under the Access Permit or Test Permit and the condition of adjacent apparatus.

8.4.5. Transfer of Recipient

Transfer of a Recipient on an Access Permit is permitted provided the Switching Coordinator is notified and the full details of the incoming and outgoing Recipients are noted on the Access Permit. The Work Group must also be notified of the change of Recipients.

Transfer of a Recipient may occur only once during the life of an Access Permit. Test Permits cannot be transferred.

8.4.6. Application of test voltages

Prior to the application of test voltages, a Test Permit shall be issued for the HV equipment under test. The following precautions must be taken to confirm the safety of workers and equipment:

- the area adjacent to where the test voltages are applied must be defined by warning tape or barriers
- workers in the vicinity of the testing area must be advised of the testing and a visual warning sign must be in place during application of test voltages
- Safety Observers must be positioned at locations to check that unauthorised workers do not enter the test area during the testing
- the test area must include all extents of the apparatus under test, e.g. both ends of a HV cable under test must be treated as a test area

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 32 of 65 |

- earthing (operator or working) must not be removed from Electrical Equipment until all workers, other than those conducting the testing, have left the area
- no worker shall re-enter the test area unless for the purposes for of re-applying Earths
- Earths must not be re-applied until the Electrical Equipment under test has been fully discharged and the application of Earths has been approved by the worker in charge of the testing
- workers must be aware that test voltages may be present after the test equipment has been de-energised and that any test equipment that is not isolated can produce a lethal charge or current.

Note: Application of test voltages may result in capacitive charge currents being present after test voltages have stopped. In these cases, suitable capacitive discharge equipment must be used.

8.4.7. Carry out HV work

The HV Work Group must install Working Earths adjacent to the HV work area. These Working Earths must be recorded on the permit when applied and also recorded when they are removed.

Working Earths are applied and removed under the control of the Permit Recipient.

8.4.8. High Voltage access duration

Where HV access is required for a period longer than one day, the HV Access Permit may be left open for the duration of the required access. Under such circumstances, the Recipient and Work Group members must check the earthing and isolation at the start of each day’s work to satisfy themselves that nothing has been changed and the isolation and earthing are still in place and the system is safe.

The Switching Coordinator must be informed that the HV Access work is continuing.

8.4.9. Signatories leaving facility

If any member of the Work Group who has signed onto an Access Permit or Test Permit leaves the facility for any reason, their replacement may assume their responsibilities.

This may only occur if the new member is of the same level of competence as the worker leaving and receives a detailed handover from the worker leaving the facility.

The new member must familiarise themselves with the permit, check all isolations and earth points and then sign onto the Access Permit or Test Permit.

8.4.10. Recipient failing to surrender an Access Permit or Test Permit

Where a Recipient who has received an Access Permit or Test Permit has left the workplace or cannot be located and the piece of equipment is required to be placed back into service, the following steps must be implemented and documented:

- All attempts must be made to contact Recipient to determine if the Access Permit or Test Permit is still current. If the Access Permit or Test Permit is not current, the Recipient must be directed to return to the workplace and surrender the Access Permit or Test Permit.
- Where a worker has received an Access Permit or Test Permit and is not available to surrender the Access Permit or Test Permit, the Switching Coordinator must advise the Recipient’s Line Supervisor.
- The Switching Coordinator must satisfy themselves that the Recipient whose name is on the Access Permit or Test Permit is not available on site and/or every attempt to contact the Recipient has been made. If the Switching Coordinator personally investigates the High Voltage Isolation including the area where the

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 33 of 65 |

Recipient was working and finds that no person is in danger or potential danger and no Electrical Equipment is in an unsafe condition they will then contact the relevant level 3 Manager. The Switching Coordinator shall also check that all Work Group members have signed off the Access Permit or Test Permit.

- The Switching Coordinator must explain the situation to the relevant level 3 Manager and seek approval to surrender the Access Permit or Test Permit.
- If approval is given to surrender the Access Permit or Test Permit, the permit may then be surrendered. The circumstances relating to this must be recorded as a non-conformance and the Recipient’s Line Supervisor must be advised as soon as possible. Any Access Permit or Test Permit and other documentation relating to the incident must be retained as evidence for further investigation.

Recipients who failed to surrender the Access Permit or Test Permits shall on returning to work may be subject to the processes detailed within the Incident Investigation Procedure ([PRO-00793](#)).

8.4.11. Surrender Access Permit or Test Permit

Before surrendering an Access Permit or Test Permit, the Recipient must confirm that all Work Group members that signed on to the Access Permit or Test Permit have signed off the permit.

Each member of the Work Group signs off the permit and acknowledges that they no longer have access to the HV apparatus and will now treat the apparatus as Live.

The Recipient must also check all Working Earths have been removed and the area is clear of all tools and equipment. The Recipient must advise the Switching Operator that the permit has been surrendered, the condition of the apparatus that was being worked on and record any abnormalities on the Access Permit or Test Permit.

The Recipient of an Access Permit or Test Permit must be the last member of the Work Group to sign off the permit before the Access Permit or Test Permit is surrendered.

If, due to exceptional circumstances, it is not possible for a Work Group member who signed on to an Access Permit or Test Permit, to sign off the form, the Recipient must:

- confirm that the Work Group member is no longer at the workplace or is incapacitated such that he/she is unable to sign off the Access Permit or Test Permit
- the Work Group member must be contacted and advised by telephone (if possible) by the Switching Coordinator that the Access Permit or Test Permit will be surrendered. If contact with the worker is not possible, they must be advised of surrender of the permit upon returning to the workplace.

After the above procedure has been followed, the Switching Coordinator may sign off in the Work Group member’s absence. The Recipient must counter-sign as witness to the Switching Coordinator’s signature.

If an Access Permit continuation sheet has been completed, the recipient must confirm that Work Group members who signed on to the continuation sheet have signed off the Access Permit or Test Permit.

8.4.12. Lost Access Permit or Test Permit

If any Access Permit or Test Permit is deemed to be lost or destroyed, the Recipient and the Work Group working under the Access Permit or Test Permit Recipient must be notified immediately. The Switching Operator must investigate the loss and must cancel the lost permit and issue a new permit.

The Recipient and Work Group working under the lost permit must be advised that a new permit will be issued. If the lost permit is recovered, it must be forwarded to the Switching Operator who will cancel the permit.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 34 of 65 |

The loss of any Access Permit or Test Permits must be immediately reported to the Switching Coordinator.

8.5. Re-energisation of High Voltage equipment

The Switching Operator must obtain permission from the Switching Coordinator to commence the Reverse Switching in accordance with the Switching Sheet.

The Switching Operator must confirm that all earthing has been removed as detailed on the Switching Sheet and Access Permit or Test Permits. All pre-energisation tests must be checked to confirm they have been performed.

If a pre-prepared Standard Work Reverse Switching Sheet is not available, the Switching Operator must prepare Reverse Switching instructions and document them on a new HV Switching Sheet.

The new Reverse Switching instructions must be developed by consulting the site single line High Voltage diagram and the previous Forward Switching Sheet to confirm all operator Earths previously applied for isolation are removed.

If a Reverse Switching Sheet is prepared after the surrender of the Access Permit or Test Permit, the Switching Coordinator must check the Reverse Switching Sheet for correct logic and to confirm it provides sufficient information to allow the correct restoration of the High Voltage supply.

The Switching Operator must confirm that all necessary pre-energisation checks have been performed and passed. Results of testing must be noted and/or attached on the Access Permit or Test Permit as necessary.

For example, if HV motors, cables or switchgear has been maintained, a certification of test from the service provider must be issued stating the apparatus is safe to be returned to service prior to re-energisation.

The Switching Operator must also check the area where the work covered by the Access Permit or Test Permit was undertaken to visually determine that all workers, tools, equipment and Working Earths are clear of the work area and any covers are secured and in place.

The Switching Operator must carry out the Reverse Switching in accordance with the Switching Sheet.

Reverse Switching must only be performed with a Switching Assistant.

The Switching Operator executes the Switching operations while the Switching Assistant reads out the items on the Switching Sheet and checks that the Switching Operator carrying out the Switching is operating the correct apparatus in an approved manner.

After completing the Reverse Switching, Switching Sheet and all permits are to be returned to the Switching Coordinator for filing. The Switching Coordinator will update the status log as required.

8.6. High Voltage records

The Switching Coordinator has the responsibility to file all completed Switching Sheets ([FRM-00438](#)), High Voltage Access Permits ([FRM-00439](#)) and High Voltage Test Permits ([FRM-00949](#)) after they are completed.

A copy of the Switching Sheets, Access Permits and Test Permits should also be scanned into CIS and stored with the associated work order where applicable.

8.6.1. Existing High Voltage installation test results

On the reinstallation of HV apparatus the results of the electrical testing must be recorded on the work order for the Electrical Work undertaken.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 35 of 65 |

A Certificate of Testing and Compliance is to be completed on every work order involving High Voltage Electrical Work.

8.6.2. New High Voltage installation test results

On a new installation of HV apparatus, results of the testing completed must be recorded by attaching a copy of the Certificate of Testing and Compliance to the work order or project paperwork as per the requirements of the *Electrical Safety Regulation* (Qld), Part 10 section 221 as shown below:

High Voltage or Hazardous Area Electrical Installations are not to be connected to an electricity source without being inspected.

- A person must not connect or reconnect a High Voltage electrical installation, or an electrical installation located in a Hazardous Area, to a source of electricity after electrical installation work or electric line work (the Electrical Work) has been performed on the electrical installation unless:
 - the Electrical Work has been inspected by an accredited auditor; and
 - the ESO accredited auditor has confirmed that the electrical installation, to the extent it is affected by the Electrical Work, has been tested to confirm it is electrically safe and complies with the requirements of the wiring rules and any other standard applying under this regulation to the electrical installation.
- A person must not, at a particular place, connect a HV electrical installation, or an electrical installation located in a Hazardous Area, to a source of electricity for the first time at the place unless:
 - the electrical installation has been inspected by an ESO accredited auditor; and
 - the accredited auditor has confirmed that the electrical installation has been tested to confirm it is electrically safe and complies with the requirements of the wiring rules and any other standard applying under this regulation to the electrical installation.
- This section applies, in addition to the other provisions in this division about the connection or reconnection of an electrical installation, to a source of electricity.

8.7. Emergency HV Switching

A HV Authorised Worker may carry out Emergency Switching where personnel safety and equipment damage may be at risk.

Emergency Switching shall generally be performed to isolate equipment without a written Switching Sheet. The Switching Coordinator must investigate the Emergency Switching and document the incident.

The Switching Coordinator must document the reasons for Emergency Switching and check all areas prior to further Switching and/or restoration of supply.

In an emergency situation or for an urgent operational requirements, such as a major flood event or major breakdown, where factors such as, but not limited to, fatigue management have to be addressed, a HV Authorised Worker from another region may be deemed authorised by the relevant Switching Coordinator for the duration of the event.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 36 of 65 |

9. Definitions

| Term | Definitions |
|--|---|
| Approve commencement of Switching | Means either written (signed) confirmation of actions or other confirmation, usually through a signed approved HV Switching Sheet, providing notations are provided stating the time, method (person, phone or electronic) and person providing approval. |
| HV Authorised Person | <p>Means a person having appropriate organisation endorsement in writing for a specific function.</p> <p>A person with technical knowledge and sufficient experience who has been approved or has the delegated authority to act on behalf of the organisation, to perform High Voltage Switching. A register of all High Voltage Authorised Personnel will be held and maintained by Seqwater.</p> <p>The following roles are Authorised Persons:</p> <ul style="list-style-type: none"> • Switching Coordinator • Switching Operator • Switching Operator’s Assistant • Recipient. <p>Levels of authorisation requirements are defined in Appendix C, HVIA access requirements.</p> |
| Authorised Worker or Authorised Person | <p>Means a person who:</p> <ul style="list-style-type: none"> • has enough technical knowledge and experience to do work that involves contact with, or being near to, the electrical part • has been approved by the person in control of the electrical part to do work that involves contact with, or being near to, the electrical part, or is authorised to act for the person in control of the electrical part. |
| Broad Supervision (Electrical Work) | This means the electrical apprentice does not require constant supervision but requires personal contact on at least a regular/occasional basis. Occasional supervision means being under instruction and direction with checks being carried out on completion of tasks. |
| Brownfield Site | Means land currently or previously used for industrial purposes or some commercial uses, it includes any land that is not a greenfield site. Land within Brownfield Sites has greater risks of the presence of underground services or contaminated soils. |
| Cat 0 – 4 PPE | <ul style="list-style-type: none"> • Category 0: One layer of untreated natural fibre clothing; no minimum PPE Arc Rating (cal/cm²). • Category 1: Fire-resistant shirt and fire-resistant pants, level 1 face shield, leather gloves; Minimum PPE Arc Rating: 4 cal/cm². • Category 2: Category 1; Minimum PPE Arc Rating: 8 cal/cm². • Category 3: Category 2 plus fire-resistant coverall; Minimum PPE Arc Rating: 25 cal/cm². |

| | | | | | |
|-------------------|---------------------------|--|------------------------------|--|-------------------|
| Version No. 11 | Document No. PRO-00006 | Document Owner: Programs & Systems Business Partner | Approval Date: 19/08/2024 | Document Approver: Manager Health, Safety & Quality | Page: 37 of 65 |
|-------------------|---------------------------|--|------------------------------|--|-------------------|

| Term | Definitions |
|---|---|
| | <ul style="list-style-type: none"> Category 4: Category 2 plus multilayer flash suit; Minimum PPE Arc Rating: 40 cal/cm². |
| Cancellation/surrender of an Access Permit or Test Permit documentation | <p>An Access Permit or Test Permit has been surrendered and authorisation for access to work on or near, or test, electrical apparatus has been terminated. Each Seqwater High Voltage workplace shall have available the following documents for inspection and/or audit:</p> <ul style="list-style-type: none"> High Voltage Switching Sheet Status Log (FRM-00522). Access Permit or Test Permit status log is located on the Switching Sheet (FRM-00438). High Voltage Switching Sheets issued or surrendered. Hard copies to be kept onsite and also scanned into CIS with the appropriate Work Order documentation. Access Permit or Test Permits in progress or surrendered. Site information including a single line High Voltage diagram of the site. List of Authorised Persons held in LMS. |
| Cathodic protection systems | <p>is a technique to control the corrosion of a metal surface by making that surface the cathode of an electrochemical cell.</p> <p>Cathodic protection can be achieved in two ways:</p> <ul style="list-style-type: none"> by the use of galvanic (sacrificial) anodes (passive) by 'impressed' current (active). |
| Certificate of Testing and Compliance / Certificate of Testing and Safety | <p>For Electrical Installations, this certifies that the electrical installation, to the extent it is affected by the Electrical Work, has been tested to confirm that it is electrically safe and is in accordance with the requirements of the wiring rules and any other standard applying under the <i>Electrical Safety Regulation</i> (Qld) to the electrical installation.</p> <p>For Electrical Equipment, this certifies that the Electrical Equipment, to the extent it is affected by the Electrical Work, is electrically safe.</p> |
| Competent Person (electrical) | <p>An Electrical Worker who has acquired, through training, qualifications, experience or a combination of these, the knowledge and skills enabling the person to perform the Electrical Work.</p> |
| Direct supervision / Constant supervision (Electrical Work) | <p>This means personal supervision at all times, on a direct and constant basis, within visual contact and/or earshot (audible range). Constant basis refers to the continuous supervision of electrical tasks being performed for the first time and until skill is demonstrated for the complexity of the task and work environment.</p> |
| Do Not Operate Board/Isolation Tag | <p>Means a safety sign attached to a High Voltage Isolation or earthing point by a Switching Operator on an apparatus that shall not be operated except as an item on a Switching Sheet or as required under a Test Permit with the approval of the Switching Coordinator. At some sites, where applicable, Do Not Operate Boards (DNOBs) may be used in place of Isolation Tags due to the nature of the isolation i.e. overhead switchgear.</p> <p>Do Not Operate/Isolation Tags are available as an Seqwater stock store item.</p> |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 38 of 65 |

| Term | Definitions |
|--------------------------------|---|
| Earths | Means fixed or portable devices that connect lines and apparatus to the general mass of earth. |
| Earthed | Electrically connected to the general mass of earth by a Conductor to provide and maintain the effective dissipation of electrical energy. |
| Electric Shock | Means a sudden discharge of electricity through a part of the body. |
| Electrical Contractors Licence | The Electrical Licensing Committee issues this licence to persons or corporations who carry on the business of electrical contracting or employ a person to perform, as an employee, electrical installation work for contracted works to 3rd party customers. |
| Electrical Competency | Means the possession of knowledge and skills acquired through training, qualification and experience and the application of the knowledge and skills to confirm the Electrical Work is performed to the required safety standard/s. The knowledge and skills should be in accordance with the requirements of Electricity Legislation in Queensland and industry best practice. |
| Electrical Engineer | <p>Means:</p> <ul style="list-style-type: none"> • a person who is a registered professional engineer (RPEQ) under the <i>Professional Engineers Act (Qld)</i> and who is registered in the area of discipline or preserved area of Electrical Engineering under the <i>Electrical Safety Act (Qld)</i> • a person who held a degree in Electrical Engineering granted by: <ul style="list-style-type: none"> ○ an approved school of engineering under the repealed <i>Professional Engineers Act (Qld)</i> ○ an approved faculty of engineering under the repealed <i>Professional Engineers Act (Qld)</i> before the repeal of that Act and who continues to hold the degree <p>a person who held, immediately before the commencement of the <i>Professional Engineers and Other Legislation Amendment Act (Qld)</i>, and continues to hold, a qualification in Electrical Engineering granted by a tertiary education institution that entitled the person to be admitted to the <i>Institution of Engineers Australia</i>, as a graduate member.</p> |
| Electrical Equipment | <p>Means any apparatus, appliance, cable, conductor, fitting, insulator, material, meter or wire:</p> <ul style="list-style-type: none"> • used for controlling, generating, supplying, transforming or transmitting electricity at a voltage greater than Extra Low Voltage • operated by electricity at a voltage greater than Extra Low Voltage • if the equipment forms part of an electrical installation located in a Hazardous Area <p>that is, or that forms part, of a cathodic protection system.</p> |
| Electrical installation work | Means the work of installing, altering or adding to an electrical installation, and includes supervising the work. |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 39 of 65 |

| Term | Definitions |
|--------------------------|--|
| | (Note: the repair of previously installed work is Electrical Work and not Electrical installation work). |
| Electrical Installations | <p>Is defined as a group of items of Electrical Equipment. However, a group of items of Electrical Equipment is an Electrical installation only if:</p> <ul style="list-style-type: none"> • all the items are permanently electrically connected together • the items do not include items that are works of an electricity entity <p>electricity can be supplied to the group from the works of an electricity entity or from a generating source.</p> |
| Electrical isolation | Means disconnected from all possible sources of electrical supply and rendered incapable of being made Live without premeditated and deliberate operation. |
| Electrical Licence | <p>The Queensland Electrical Licensing Committee issues the following classes of Electrical Licences in Queensland:</p> <ul style="list-style-type: none"> • electrical mechanic licence • electrical linesperson licence • electrical fitter licence • electrical jointer licence • restricted Electrical Work licence • Electrical Work training permit. |
| Electrical Supervisor | Electrical Supervisor is a person who has the electrical competency to manage/ supervise the Electrical Workers and the Electrical Work being performed on associated equipment and systems. The Electrical Supervisor is the most senior electrician in the Work Group. |
| Electrical Supervision | <p>Supervision and inspection of electrical assets, Electrical Work, Electrical Workers including apprentices and the regular, documented inspections of Electrical Work performed by Electrical Workers. Inspections verify Seqwater’s policies, procedures and practices are complied with.</p> <p>The act of supervising the performance of Electrical Workers including apprentices is to check the Electrical Works are safe and are operated in a way that is electrically safe.</p> |
| Electrical Work | <p>Means:</p> <ul style="list-style-type: none"> • connecting electricity supply wiring to Electrical Equipment or disconnecting electricity supply wiring from Electrical Equipment • manufacturing, constructing, installing, removing, adding, testing, replacing, repairing, altering or maintaining Electrical Equipment or an electrical installation <p><i>Examples of Electrical Work–</i></p> <ul style="list-style-type: none"> ○ <i>installing Low Voltage electrical wiring in a building</i> ○ <i>installing Electrical Equipment into an installation coupler or inter-connector</i> |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 40 of 65 |

| Term | Definitions |
|------|--|
| | <ul style="list-style-type: none"> ○ <i>replacing a Low Voltage electrical component of a washing machine</i> ○ <i>maintaining an electricity entity's overhead distribution system.</i> <p>Electrical Work does not include the following:</p> <ul style="list-style-type: none"> ● work that involves connecting Electrical Equipment to an electricity supply by means of a flexible cord plug and socket outlet ● work on a non-electrical component of Electrical Equipment, if the person carrying out the work is not exposed to an electrical hazard <p><i>Examples—</i></p> <ul style="list-style-type: none"> ○ <i>painting Electrical Equipment covers</i> ○ <i>repairing hydraulic components of an electrical motor</i> ○ <i>replacing a drive belt on a washing machine</i> <ul style="list-style-type: none"> ● replacing Electrical Equipment or a component of Electrical Equipment if that task can be safely performed by a person who does not have expertise in carrying out Electrical Work <p><i>Examples—</i></p> <ul style="list-style-type: none"> ○ <i>replacing a fuse</i> ○ <i>replacing a light bulb in a light fitting</i> <ul style="list-style-type: none"> ● assembling, making, modifying or repairing Electrical Equipment in a workplace under the WHS Act 2011 that is prescribed under a regulation for this paragraph, if that is the principal manufacturing process at the workplace, and arrangements are in place, and are detailed in written form, for ensuring that: <ul style="list-style-type: none"> ○ the work is done safely and competently ○ the equipment is tested to confirm compliance with relevant standards ● building or repairing ducts, conduits or troughs (channels) where electrical wiring will be or is installed, if: <ul style="list-style-type: none"> ○ the channels are not intended to be Earthed ○ wiring installed in the channels is not energised ○ the work is done under the supervision of a person licensed to perform electrical installation work ● locating or mounting Electrical Equipment, or fixing Electrical Equipment in place, if this task is not performed in relation to the connection of Electrical Equipment to an electricity supply ● assisting a licensed Electrical Worker to carry out Electrical Work, on Electrical Equipment under the Direct supervision of the Electrical Worker, if the assistance does not involve physical contact with any energised Electrical Equipment ● carrying out Electrical Work, other than work on energised Electrical Equipment, in order to meet eligibility requirements in relation to becoming a licensed Electrical Worker and only if the work is prescribed under a regulation for this paragraph |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 41 of 65 |

| Term | Definitions |
|--|--|
| | <ul style="list-style-type: none"> • building, under the supervision of an electricity entity, an overhead electric line on structures that do not already carry an energised overhead electric line • laying, cutting or sealing underground cables that are part of the works of an electricity entity before the initial connection of the cables to an electricity source • recovering underground cables that are part of the works of an electricity entity after disconnection from an electricity source • altering, repairing, maintaining or recovering an overhead electric line that is part of the works of an electricity entity, if the work is performed under the entity’s supervision and: <ul style="list-style-type: none"> ○ if the line is not on supports supporting another electric line—the line has been isolated from an electricity source so that the closure of a switch cannot energise the section of the line where work is being done ○ if the line is on supports supporting another electric line—both lines have been isolated from an electricity source so that the closure of a switch cannot energise the section of the line where the work is being done or an adjacent section of the other line • erecting structures for the support of Electrical Equipment <ul style="list-style-type: none"> ○ <i>Examples of structures—</i> <ul style="list-style-type: none"> ○ <i>electric poles and towers</i> • locating, mounting or fixing in place Electrical Equipment, other than: <ul style="list-style-type: none"> ○ making or terminating electrical connections to the equipment ○ installing supply conductors that will connect the equipment to a supply of electricity <p>maintaining the structural parts of the electrical traction system on a railway, other than overhead electric lines, that forms part of the works of an electrical entity, if the work is structural work performed under a safe system of work.</p> |
| Electrical Worker | Means a person competent and licensed in accordance with the <i>Electrical Safety Act</i> (Qld). |
| Electrical Worker Register | A register of Electrical Workers and electrical apprentices is a legislative requirement. It lists the electrical competencies of each worker and is maintained in <i>Our Learning</i> . |
| Electrical Work Permit | Means a system designed to eliminate or minimise risks from Electrical Work activities by controlling when and how Electrical Work is undertaken in specific areas |
| Emergency Switching | Means unplanned Switching for safeguarding personnel, preventing equipment damage, environmental harm or restoring supply or providing access for repair of apparatus. |
| Engineering electrical safety competency | Is designed to enable workers with existing Electrical Engineering qualifications to demonstrate current awareness and competency to inspect |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 42 of 65 |

| Term | Definitions |
|---|---|
| | and risk assess electrical cabinets, enclosures and switchboards before work is carried out. |
| Exclusion Zones | <p>Generally, the Exclusion Zones for overhead electric lines are:</p> <ul style="list-style-type: none"> • Untrained Persons – 3000mm (3m). • Authorised and Instructed Persons – 700mm (0.7m). <p>However, the Exclusion Zones vary depending on the:</p> <ul style="list-style-type: none"> • type of electric part (e.g. exposed part or overhead) – the voltage present (e.g. 240V or 33kV) • qualification / competency of the worker • type of activity (e.g. operating plant or vehicle). <p>Schedule 2 of the <i>Electrical Safety Regulation 2013 (Qld)</i> and the <i>Electrical Safety Code of Practice 2010 - Working near overhead and underground electric lines (Qld)</i> should be consulted to confirm the appropriate Exclusion zone.</p> |
| Extra Low Voltage (ELV) | Means a voltage of less than 50v AC. or 120V ripple free DC. |
| Forward Switching | Means the process of de-energising an electrical circuit as specified on a High Voltage Switching Sheet. |
| General Supervision (Electrical Work) | This means the electrical apprentice does not require constant attendance of the supervisor but requires personal contact on a recurrent (periodic) basis. Periodic supervision means being under instruction and direction for tasks being performed. |
| Hazardous Area | An area in which an explosive atmosphere is present, or may be expected to be present, in quantities such as to require special precautions e.g. presence of vapours or gases, combustible liquids, dusts or fibres, or other flammable or explosive materials |
| High Voltage Lock | An individually keyed lock used for HV isolations that is applied to a High Voltage Isolation or earthing point by a Switching Operator as part of steps on the High Voltage Switching Sheet (FRM-00438). |
| High Voltage Switching | Where load shifting, isolating of HV equipment is required and there is no possibility of direct HV contact or intrusion into HV Exclusion Zones. Does not include normal day-to-day operational activity of stop/start of High Voltage equipment. |
| High Voltage (HV) Switching Sheet | A High Voltage Switching Sheet (FRM-00438) is a documented procedure which details the step-by-step Switching actions that are necessary to allow safe access to a High Voltage installation and/or to restore that installation to its normal energised state. High Voltage Switching Sheets may be either blank or pre-drafted. All High Voltage Switching Sheets must be reviewed and signed off by a Switching Coordinator before HV Switching can be undertaken by a Switching party. See High Voltage Switching Sheet (FRM-00438). There is no such document as a pre-approved Switching sheet. |
| High Voltage Switching Sheet Status Log | A High Voltage Switching Sheet Status Log (FRM-00522) is a schedule used to record the High Voltage Switching Sheet numbers (in numerical order) and the |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 43 of 65 |

| Term | Definitions |
|---|---|
| | dates when the sheets are issued and recovered. See Section 15 for the information on the High Voltage Switching Sheet Status Log (FRM-00522). |
| High Voltage Isolation and Access (HVIA) Permit | A High Voltage and Access (HVIA) Permit (FRM-00439) is a written statement that allows personnel access to High Voltage parts. It is also used to record the Electrical Isolations and locations of Earths necessary to make the equipment/areas electrically and mechanically safe. Operator Earths shall not be removed while an Access Permit is currently open. |
| High Voltage Isolation and Access (HVIA) Permit Recipient | A person suitably qualified and authorised by the Site Access and Works Control System to receive and surrender a HVIA Permit for the duration of work being performed on the equipment for which the Access Permit is issued. The Recipient shall also be responsible for the safety of Work Group/s signed on the Access Permit and if required, placement and removal of Working Earths. |
| High Voltage Isolation and Access (HVIA) Test Permit Status Log | A HVIA permit status log is a schedule that is used to record the HVIA Permit numbers (in numerical order) and the dates when the permits are issued and recovered. See information on the standard High Voltage Switching Sheet Status Log (FRM-00522) |
| High Voltage (HV) | Voltages in excess of 1000 volts AC or 1500 volts ripple-free DC. |
| High Voltage Isolation | Isolation is deemed to exist for an electrical part if an adequate break exists between the High Voltage supply and the apparatus requiring access to confirm that lightning or Switching surges will not cross the Isolation Point. Isolation Points shall be clearly identified by attachment of a Do Not Operate tag. Operating handles that have facilities to lock the mechanism in the open position shall be locked or made inoperable by other suitable means to achieve isolation. |
| Isolation Point | A suitable means of disconnection that prevents the inadvertent energisation of Electrical Equipment. Do Not Operate/Isolation Tags shall be attached at Isolation Points. |
| Instructed Person | A person who is acting under the supervision of an Authorised Person. |
| Live | Connected to a source of electrical supply or subject to hazardous induced or capacitive voltages. Generally, Live refers to a conductor or conductive part intended to be energised in normal use, including a neutral conductor and conductive parts connected to a neutral conductor. |
| Line Supervisor | A Line Supervisor is a person with day-to-day supervisory responsibilities for workers within a functional area of the business. A Line Supervisor includes, but is not limited to, Team Leaders, Coordinators and Level 4 or 5 Supervisors. A Line Supervisor is also considered a worker but has additional responsibilities for the implementation of the HSW Management System as identified in the HSW Management System and/or position description. |
| Live Electrical Work | Electrical Work performed in circumstances in which some or all of the Electrical Equipment which is the subject of the Electrical Work is energised. |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 44 of 65 |

| Term | Definitions |
|---|---|
| | Where isolations are required it is considered Live Electrical Work until the isolation has been proven effective. |
| Low Voltage (LV) | An operating voltage that exceeds Extra Low Voltage but does not exceed 1000V AC or 1500V ripple free DC as dined in <i>AS/NZS 3000 Electrical Installations</i> (also known as the wiring rules). |
| Manager | A person with the responsibilities for managing a functional area of the business including the workers within the relevant functional area. This includes, but is not limited to, Level 3 Managers, General Managers and Project Managers. A Manager is also considered a worker; however, Managers may have additional responsibilities for implementation of the HSW Management System as well as any additional responsibilities as an officer of the business. |
| New electrical ICT equipment | ICT equipment that is new and the supplier is deemed responsible for its initial electrical safety. |
| Operator Earths | Means Earths capable of withstanding fault currents, placed by an Authorised Person. Placement and removal of operator Earths shall be documented on a High Voltage Switching Sheet. |
| Permit User/2 nd Checker | The person who reviews section 3 of the permit and verifies that the documented controls are in place and appropriate for controlling the hazards of performing Electrical Work |
| Permit Recipient | The person who is to undertake the Electrical Work and completes the relevant sections of the work permit. They must be competent to undertake the work and implement the appropriate controls. |
| Person in Control of Electrical Equipment | The person in control of the Electrical Equipment may be a plant operator or Manager, control room operator or coordinator. |
| Pre-drafted Switching sheets | Is a Switching sheet that has been prepared for previous HV Switching. Pre-drafted Switching Sheets require the same level of review and approval as a new Switching sheet. |
| Restricted Electrical Licence | <p>A Restricted Electrical Licence authorises the holder to do Electrical Work linked to or for the purposes of their trade or calling. It is subject to restrictions or conditions as specified on the licence.</p> <p>The work that can be performed under the authority of a Restricted Electrical Licence is limited to:</p> <ul style="list-style-type: none"> • equipment in work area categories as detailed in the work area categories • operating at voltages up to 250 volts or 650 volts AC. <p>The work includes:</p> <ul style="list-style-type: none"> • replacement of flexible cord and or plugs on a like-for-like basis • testing for the safe isolation and restoration of equipment to be disconnected and reconnected • disconnection and reconnection of electrical wiring at equipment to the extent of allowing non-Electrical Work to be carried out |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 45 of 65 |

| Term | Definitions |
|--------------------------------|--|
| | <ul style="list-style-type: none"> replacement of electrically operated equipment on a like-for-like basis. <p>A Restricted Electrical Licence does not enable a worker to install or alter any part of the fixed electrical wiring system. This is considered electrical installation work.</p> |
| Reverse Switching | is the process of re-energising an electrical circuit as specified on a High Voltage Switching Sheet. |
| Specified Electrical Equipment | <p>Used for the performance of manufacturing work:</p> <ul style="list-style-type: none"> a cord extension set (extension lead) with a current rating of not more than 20 amps a portable outlet device with a current rating of not more than 20 amps Electrical Equipment, other than a portable Safety Switch that: <ul style="list-style-type: none"> has a current rating of not more than 20 amps is connected by a flexible cord and plug to Low Voltage supply. <p>Used for the performance of service work or office work:</p> <ul style="list-style-type: none"> a cord extension set (extension lead) with a current rating of not more than 20 amps a portable outlet device with a current rating of not more than 20 amps Electrical Equipment, other than a portable Safety Switch that: <ul style="list-style-type: none"> has a current rating of not more than 20 amps is connected by a flexible cord and plug to Low Voltage supply <p>is moved during its normal use for the purpose of its normal use.</p> |
| Safety Observer | <p>In relation to the observing of the performance of Electrical Work, means a person:</p> <ul style="list-style-type: none"> who is competent to help with the Electrical Work and to implement control measures in an emergency who is competent to rescue the person performing the Electrical Work and to provide resuscitation <p>whose competence has been assessed in the last 12 months.</p> |
| Safety Observer Exclusion Zone | The person enforcing the Exclusion zone and in constant contact with workers with the potential to enter the exclusion zone. |
| Safety Observer Zone | Is an area in which it is possible that any part of operating plant, a person working on an elevating work platform, or a load being moved could enter the Exclusion zone of Live electric lines. |
| Safety Switch | A residual current device (RCD), type 1 or type 2 Safety Switches. |
| Serious Electrical Incident | <p>An incident when a person:</p> <ul style="list-style-type: none"> was killed by electricity received a shock or injury from electricity, and was treated for the shock or injury by or under the supervision of a doctor |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 46 of 65 |

| Term | Definitions |
|-----------------------|---|
| | <ul style="list-style-type: none"> received a shock or injury from electricity at High Voltage, whether or not the person was treated for the shock or injury by or under the supervision of a doctor. <p>Note: High Voltage means a voltage above 1000 V AC or 1500 V ripple-free DC.</p> |
| Switching | Any action that alters connections in an electrical circuit or any action specified on a High Voltage Switching Sheet. |
| Switching Assistant | <p>An Authorised Person with appropriate training and experience who is competent to assist a Switching Operator. An approved person working under the direct personal supervision of a Switching Operator for the purposes of training.</p> <p>A Switching Assistant may carry out the Switching tasks under the direction of a Switching Operator.</p> <p>First year electrical apprentices shall not be used as Switching Assistants. Apprentices other than first year apprentices may be used as Switching Assistants providing they meet the necessary training requirements.</p> |
| Switching Coordinator | <p>An Authorised Person who has received specific High Voltage training to enable them to check, approve and authorise High Voltage Switching Sheets. No person shall be deemed to be authorised unless they have received formal training in High Voltage Switching techniques.</p> <p>The Switching Coordinator must not perform any other role when a Switching program is being performed.</p> |
| Switching Operator | <p>An Authorised Person who has received specific High Voltage training to enable them to select, prepare and carry out High Voltage Switching operations. No person shall be deemed to be authorised unless they have received formal training in High Voltage Switching techniques.</p> <p>A Switching Operator may transfer responsibilities on a Switching Sheet to another authorised Switching Operator should they not be available to complete a Switching Sheet after notifying the Switching Coordinator.</p> <p>An approved person working under the direct personal supervision of a Switching Operator for the purposes of training.</p> |
| Test Permit | <p>A Test Permit is a written statement that allows personnel access to restricted equipment/areas. It is also used to record the electrical isolation necessary to make the equipment/areas electrically safe. Operator Earths may be removed for the purposes of applying test voltages to electrical apparatus while a Test Permit is open. After testing is completed, Operator Earths may have to be re-applied.</p> <p>Seqwater use the HV Test Permit (FRM-00949) for this purpose.</p> |
| Test Permit Recipient | A person qualified to receive and surrender a Test Permit for the duration of work being performed on the equipment for which the Test Permit is issued. |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 47 of 65 |

| Term | Definitions |
|-------------------------|---|
| | The Test Permit Recipient shall also be responsible for the safety of Work Group/s signed to the Test Permit and for directing the removal and placement of Operator Earths for performing tests. |
| Untrained Person | A person who is not an Authorised Person or an Instructed Person for the electric line. |
| Voltage levels | <p>Extra Low Voltage: means a voltage of less than 50V AC. or 120V ripple free DC.</p> <p>Low Voltage: means exceeding Extra Low Voltage, but not more than 1000VAC or 1500V ripple free DC.</p> <p>High Voltage: Exceeding Low Voltage.</p> |
| Work Group (electrical) | <p>A worker or team of workers reporting to the Access Permit or Test Permit Recipient regarding work carried out under an Access Permit or Test Permit as directed by the Recipient of that permit.</p> <p>The qualifications and experience of Work Group members shall be discussed with the Switching Coordinator prior to signing on a Work Group.</p> |
| Working Earths | <p>Means Earths placed at the work area under the coordination of a Recipient to limit the rise in potential difference and capable of withstanding fault current at the work area.</p> <p>Working Earths shall be rated at the expected fault current and duration of protection operation of the protective device.</p> |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 48 of 65 |

10. Roles and Responsibilities

| Role | Responsibility |
|-----------------------|---|
| Electrical Supervisor | <ul style="list-style-type: none"> • Inform workers of electrical safety requirements at a level relative to the electrical hazards that those workers are, will, or might reasonably be exposed to. • Implement a systematic process to manage electrical hazards within their area of responsibility. • Communicate, consult, instruct and supervise workers involved in Electrical Work. • Regularly monitor and review workers involved in Electrical Work activities and regularly check that they have current and appropriate levels of training and competency for the Electrical Work being undertaken. • Inform Learning and Development Team of changes to worker competencies. • Regularly monitor and review the effectiveness of controls and implement corrective actions and treatment plans where required. • Report any incidents relating to electricity to Seqwater’s incident hotline (07) 3270 4040. |
| Electrical Worker | <ul style="list-style-type: none"> • Only undertake Electrical Work allowed by the level of Electrical Licence held by the Electrical Worker and the Electrical Worker’s training and qualification. • Comply with the requirements of safety instructions relating to the use of Electrical Equipment. • Report any incidents relating to electricity to Seqwater’s incident hotline (07) 3270 4040. |
| General Manager | Approve, in consultation with the Manager, HSQ, any requests to undertake work within an Untrained Person’s electrical Exclusion zone at an Seqwater controlled workplace. |
| HSQ Team | <ul style="list-style-type: none"> • Provide advice, procedures, tools and templates to support the management of hazards associated with electricity and Electrical Work. • Report trends and analysis of hazard identification and effectiveness of controls to relevant stakeholders. • Complete workplace monitoring activities to verify the hazard identification and risk management process • Report any incidents relating to electricity to Seqwater’s incident hotline (07) 3270 4040. |
| HV Permit Recipient | <ul style="list-style-type: none"> • Be satisfied that all necessary actions have been carried out to establish safe conditions of access. • Receive the HV Access Permit granting access. • Advise the Work Group of the scope of work, extent of isolation and earthing. |

| | | | | | |
|-------------------|---------------------------|--|------------------------------|--|-------------------|
| Version No. 11 | Document No. PRO-00006 | Document Owner: Programs & Systems Business Partner | Approval Date: 19/08/2024 | Document Approver: Manager Health, Safety & Quality | Page: 49 of 65 |
|-------------------|---------------------------|--|------------------------------|--|-------------------|

| Role | Responsibility |
|---|---|
| | <ul style="list-style-type: none"> • Perform work within the constraints of the access on the permit. • Direct placement and removal of the Working Earths if applicable. • Surrender access and record on the permit upon the completion of work. <p>Where the Permit Recipient/Work Group are performing Electrical Work or there is a possibility of the work encroaching within a High Voltage exclusion zone, the recipient must:</p> <ul style="list-style-type: none"> • supervise electrical safety at the worksite and where required appoint a Safety Observer if the work to be performed has the potential to come within the relevant exclusion zone. On appointment of the Safety Observer a recipient must: <ul style="list-style-type: none"> ○ identify the observer to the working group ○ instruct the Work Group to follow safety directions given by the Safety Observer <p>instruct the Safety Observer that they shall not carry out any work while performing their role of Safety Observer.</p> |
| <p>Learning and Organisational Development (LOD) Unit</p> | <ul style="list-style-type: none"> • Develop and maintain a Training Needs Analysis (TNA) which includes training requirements for undertaking Electrical Work. • Maintain the Electrical Worker Register for Electrical Workers and engineers performing work in their area of responsibility. • Develop and implement a training schedule for electrical safety in accordance with the requirements of this Procedure and the TNA. |
| <p>Manager</p> | <p>To ensure a systematic process is in place to manage electrical hazards at Seqwater workplaces within their area of responsibility</p> <ul style="list-style-type: none"> • Provide adequate resources to comply with this Procedure. • To the extent reasonably practicable, have a systematic process in place to manage electrical hazards at Seqwater workplaces within their area of responsibility. • Report any incidents relating to electricity to Seqwater’s incident hotline (07) 3270 4040. • that Electrical Equipment is electrically safe • the electrical safety of all persons and property likely to be affected by Electrical Equipment. |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 50 of 65 |

| Role | Responsibility |
|------------------------------|---|
| <p>Manager, HSQ</p> | <ul style="list-style-type: none"> • Provide adequate HSW resources to provide advice, procedures, tools and templates to support the management of hazards associated with electricity and Electrical Work. • Implement a systematic process to monitor work activities to verify the hazard identification and risk management process. • Provide advice and support to the relevant General Manager on any requests to undertake work within an Untrained Person’s electrical exclusion zone at an Seqwater controlled workplace • Report Serious Electrical Incidents, dangerous electrical incidents and Electric Shock incidents to the Electrical Safety Office in accordance with the <i>Electrical Safety Act (Qld)</i> and <i>Electrical Safety Regulation (Qld)</i> and assist with management of those incidents. |
| <p>Switching Coordinator</p> | <ul style="list-style-type: none"> • Familiarise themselves with the intent of the Switching and understand the consequences of each operation on the network before commencing any Switching Sheet. • Coordinate HV Switching with the relevant Switching Operators and authorities. • Direct and coordinate the progress of Switching with all Switching Operators. • Approve, issue and manage HV Access Permits. • Maintain up-to-date records of the status of all Switching Sheets and HV Access Permits as they are executed. • Direct any or all Switching to cease if any danger arises to personnel, electrical apparatus or network security. • Where applicable, undertake Switching by remote control. • If there are any abnormalities that aren’t identified on the HV Access Permit, take appropriate action for Reverse Switching to be carried out safely. <p>Switching Coordinators may perform the following roles:</p> <ul style="list-style-type: none"> • Switching Coordinator • Switching Operator Assistant • HV Permit Recipient • Individual of a Work Group. <p>Where after hours work is required, a Switching Coordinator may perform the role of Switching Coordinator and Switching Operator Assistant. Under no circumstance can a Switching Coordinator also perform the role of Switching Operator.</p> |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 51 of 65 |

| Role | Responsibility |
|-------------------------------|--|
| Switching Operator | <ul style="list-style-type: none"> • Carry out Switching. • Issue HV Access Permits. • Familiarise themselves with the intent of the Switching and understand the consequences of each operation on the network before commencing any Switching Sheet. • Confirm Switching is carried out using approved operating equipment in current test date. <p>Switching Operators may perform the following roles:</p> <ul style="list-style-type: none"> • Switching Operator • Switching Operator Assistant • HV Permit Recipient • Individual of a Work Group. <p>When a Switching Operator performs the role of a Switching Operator Assistant or HV Permit Recipient, the Switching Operator also has the responsibilities applicable to that role.</p> |
| Switching Operators Assistant | <ul style="list-style-type: none"> • Consult with the Switching Operators to become familiar with the intent of the Switching Sheet. • Understand the consequences of each operation when performing tasks as directed by the Switching Operator. • Advise the Switching Operator of any abnormality observed during Switching Operations (e.g. dangerous situations, switch malfunctions). <p>A Switching Operator’s Assistant may perform the following roles:</p> <ul style="list-style-type: none"> • Switching Operator Assistant • HV Permit Recipient • Individual of a Work Group. <p>When a Switching Operators Assistant performs the role of a HV Permit Recipient, the Switching Operators Assistant also has the responsibilities of a HV Permit Recipient.</p> |
| Workers | <ul style="list-style-type: none"> • take reasonable care for their own electrical safety • take reasonable care to not adversely affect the electrical safety of other persons • comply with the instructions given by a representative of Seqwater, for the electrical safety of workers • use personal protective equipment (PPE), where: <ul style="list-style-type: none"> ○ the PPE is provided by the person in control of the Electrical Equipment for electrical safety purposes ○ the worker is properly instructed in the use of the PPE provided. • comply with Seqwater policies and procedures relating to work health and safety and electrical safety at the workplace (including this Procedure). |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 52 of 65 |

| Role | Responsibility |
|------|---|
| | <ul style="list-style-type: none"> A worker must not wilfully interfere with or misuse anything provided for electrical safety at the workplace. |

11. Training

Training and induction will be provided in accordance with the Learning Governance and System Procedure ([PRO-02605](#)).

All training records will be stored in Our Learning, while certificates and copies of assessments will be kept in the REX Learning/Compliance folder for the individual.

| Apprentice | Electrical Worker | Electrical Engineer | Overhead Spotter | High Voltage Worker | General workers |
|---------------------------|--|---|--|---|--|
| Electrical Apprenticeship | Electrical Licence (valid for 5 years) Renewal includes an assessment | Electrical Engineering qualifications | Accredited training in overhead electrical awareness and emergency response that has been approved by the electrical supply authority (e.g. Energex) | Assessed as competent to perform the role before authorisation or re-authorisation is provided (2 yearly external training and 2 yearly in-house assessment) | Electrical Risks for Non-Electrical Workers awareness course |
| LV Rescue (12 months) | LV Rescue (12 months) | LV Rescue (12 months) | | High Voltage Isolation and Access Training (2 yearly) | |
| CPR (12 monthly) | CPR (12 monthly) | LV Rescue (12 months) CPR (12 monthly) | | | |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 53 of 65 |

12. References and Related Materials

12.1. Legal and other requirements

| Description |
|---|
| Work Health & Safety Act 2011 (QLD) and Work Health & Safety Regulation 2011 (QLD) |
| Electrical Safety Act 2002 (Qld) |
| Electrical safety code of practice 2020 – Managing electrical risks in the workplace (Qld) |
| Electrical safety code of practice 2020 – Working near overhead and underground electric lines (Qld) |
| Electrical Safety Regulation 2013 (Qld) |
| How to Manage Work Health and Safety Risks Code of Practice 2021 (Qld) |
| Professional Engineers Act 2002 (Qld) |
| AS/NZS 3190 Approval and test specification – Residual current devices (current-operated earth leakage devices) |
| AS/NZS 3012 Electrical Installations – Construction and Demolition |
| AS 2832:3 Cathodic Protection of Metals – Immersed Structures |
| AS 2832.4 Cathodic Protection of Metals – Internal Surfaces |
| AS 2790 Electrical Generating Sets – Transportable (up to 25 kW) |
| AS/NZS 3000 Electrical Installations (also known as the wiring rules) |
| AS 3010 Electrical Installations – Generating Sets |
| AS/NZS 3012 Electrical Installations – Construction and Demolition Sites |
| Professional Engineers and Other Legislation Amendment Act 2008 (Qld) |
| AS/NZS 3760 In-service safety inspection and testing of Electrical Equipment |
| AS 2225 Insulating Gloves for Electrical Purposes |
| AS/NZS 2978 Insulating Mats for Electrical Purposes |

12.2. Seqwater documents

| Description | Location |
|---|----------|
| ERP-00079 Emergency Preparedness and Response Procedure | REX |
| FRM-00413 Excavation and Trenching Permit Form | REX |
| FRM-00438 High Voltage Switching Sheets | REX |
| FRM-00439 High Voltage Access Permit Form | REX |
| FRM-00522 High Voltage Switching Sheet Status Log Form | REX |
| FRM-00629 High Voltage ReAuthorisation Form | REX |

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 54 of 65 |

This document is the property of Seqwater. It must not be copied or reproduced in any way whatsoever without the authority of Seqwater. This document is uncontrolled when printed. An electronic database manages and stores the controlled version.

| Description | Location |
|--|----------|
| FRM-00636 Penetration Permit Form | REX |
| FRM-00795 Health, Safety and Wellbeing Management System Deviation Approval Form | REX |
| FRM-00949 High Voltage Test Permit Form | REX |
| FRM-01101 Verification of Competency Assessment – New Starter Electrical | REX |
| FRM-01287 Electrical Test Sheet | REX |
| PRO-00014 Energy Tag and Lockout Procedure | REX |
| PRO-00302 Excavation, Trenching and Penetrations Procedure | REX |
| PRO-00657 Hazard Identification and Risk Management Procedure | REX |
| PRO-00793 Incident Investigation Procedure | REX |
| PRO-00808 Contractor Management Procedure (HSW, Env & DWQ) | REX |
| PRO-00867 Safe Work with Plant Procedure | REX |
| PRO-01120 Learning and Professional Development Procedure | REX |
| PRO-01752 Asbestos Management Procedure | REX |
| PRO-02605 Learning Governance and System Procedure | REX |
| RSK-00480 Working On, In or Near Water Generic SWMS | REX |
| SPE-00352 Engineering Standard E-SPE-STD-001 Electrical Design and Construction | REX |
| TEM-00013 Safe Work Method Statement (SWMS) Template | REX |

13. Record keeping

Seqwater must record the performance of all Electrical Work, including Live Electrical Work undertaken by Seqwater workers. Risk assessments and SWMS developed for Electrical Work must be kept and in accordance with the retention and disposal procedure if there is a dangerous electrical incident or serious electrical event.

Electrical contractors who undertake Electrical Work at Seqwater workplaces must provide Seqwater with a Certificate of Testing and Compliance at the completion of the work.

The following Electrical Work records shall be maintained to validate electrical compliance:

- register of Electrical Workers and electrical apprentices
- appliance test and tagging registers
- RCD Testing Registers
- records of performance of Live Electrical Work
- Certificate of Testing and Safety
- testing and maintenance of safety equipment (including calibration and repairs)
- register of suitability of testing equipment.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 55 of 65 |

Appendix A – Electrical apprentice supervision requirements

The following electrical apprentices’ supervision requirements table is to be used as a guide only and is dependent on the electrical apprentice’s level of competence.

| Type of Work | Apprentice/ Trainee (Year) | Supervision Required |
|---|--|----------------------|
| New installations (not connected to electricity supply) | 1 st | Direct |
| | 2 nd | Direct/General |
| | 3 rd | General |
| | 4 th or Final | Broad |
| Alterations and additions (existing installations) | 1 st | Direct |
| | 2 nd | Direct |
| | 3 rd | General |
| | 4 th or Final | Broad |
| Maintenance of installations and equipment | 1 st | Direct |
| | 2 nd | Direct |
| | 3 rd | General |
| | 4 th or Final | Broad |
| Workshop tasks | 1 st | Direct |
| | 2 nd | General |
| | 3 rd | General/Broad |
| | 4 th or Final | Broad |
| Live work | 1 st | * |
| | 2 nd | * |
| | 3 rd | * |
| | 4 th or Final | Direct |
| Isolation of installations and equipment | 1 st | * |
| | 2 nd | * |
| | 3 rd | Direct |
| | 4 th or Final | Direct |
| HV work | Electrical apprentices are prohibited from performing any role in a HV Work Group. | |

* Note that an apprentice/trainee cannot, in the first 6 months of the apprenticeship/training program work:

- in the immediate vicinity of a Live High Voltage exposed part; or
- where there is a risk the training person could come into contact with a Live Low Voltage exposed part.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 56 of 65 |

Appendix B – Electrical Safety Observer requirements

| Exclusion zone Safety Observer | Low Voltage Safety Observer | High Voltage Safety Observer |
|--|---|---|
| Should be hazard and risk aware. | Must be hazard and risk aware. | Must be hazard and risk aware. |
| Should be assigned to no other duties, other than as Safety Observer to observe, warn and communicate. | Must be assigned to no other duties, other than as Safety Observer to observe, warn and communicate. | Must be assigned to no other duties, other than as Safety Observer to observe, warn and communicate. |
| Should not observe more than one crane or plant at a time. | Should not observe more than one crane or plant at a time. | Not a requirement. |
| Should not be positioned in an elevating work platform basket. | Should not be positioned in an elevating work platform basket. | Must maintain a suitable position to observe the work. |
| <p>Should be appropriately skilled in observing, warning and communicating effectively. Warns about:</p> <ul style="list-style-type: none"> • approach to electrical apparatus • unsafe conditions. | <p>Must be appropriately skilled in observing, warning and communicating effectively. Warns about:</p> <ul style="list-style-type: none"> • approach to electrical apparatus • unsafe conditions. | <p>Must be appropriately skilled in observing, warning and communicating effectively. Warns about:</p> <ul style="list-style-type: none"> • potentially unsafe actions • lack of compliance with approved work documentation. |
| Should be able to stop the work being performed. | Should be able to stop the work being performed. | Must be able to stop the work being performed. |
| Must have completed accredited training in overhead electrical awareness and emergency response approved by the electrical supply authority (e.g. Energex) | Must be competent to help with the Electrical Work. The Safety Observer does not need to hold an Electrical Work license or do the work themselves. To 'help' is to assist or facilitate the work being performed. | Must be competent to perform the Electrical Work being performed. This means that the Safety Observer must be the holder of an Electrical Work licence. |
| | Must be competent in isolation techniques where appropriate. | Not a requirement. |
| | <p>Must provide assistance in emergencies and be competent to:</p> <ul style="list-style-type: none"> • rescue the person performing the work • provide resuscitation to the person performing the work (assessed in the last six months). | <p>Must provide assistance in emergencies and be competent to:</p> <ul style="list-style-type: none"> • rescue the person performing the work • provide resuscitation to the person performing the work (assessed in the last six months). |

| | | | | | |
|--------------------------|----------------------------------|---|-------------------------------------|---|--------------------------|
| Version No. 11 | Document No. PRO-00006 | Document Owner: Programs & Systems Business Partner | Approval Date: 19/08/2024 | Document Approver: Manager Health, Safety & Quality | Page: 57 of 65 |
|--------------------------|----------------------------------|---|-------------------------------------|---|--------------------------|

Appendix C – Test and Tag requirements


| Location / Work Situation | Test Tag Requirement | Residual current devices (Note 1) | | | |
|---|---|--|-----------|---------------------------------|------------|
| | | Push button Test (by User) | | Operating Time and Current Test | |
| | | Portable | Fixed | Portable | Fixed |
| Construction / Project Sites (Note 2) | 3 monthly | After connection to a socket, and before connection to equipment | 1 month | 3 monthly | 12 monthly |
| Operational Areas including: Water Treatment Plant, Dam Operations, Recreation & Catchments | 6 monthly | Daily or before every use, whichever is the longer | 6 monthly | 12 monthly | |
| Administration Building and Offices (Electrical Equipment is subject to flexing in normal use or in a kitchen or bathroom area) | 12 monthly | 3 monthly | 6 monthly | 12 monthly | |
| Administration Building and Offices (Electrical Equipment is NOT subject to flexing in normal use and is NOT open to abuse and is NOT in a kitchen or bathroom area) | 5 yearly | 3 monthly | 6 monthly | 2 yearly | |
| Hire Equipment | 3 monthly | Including push button test by hirer prior to hire | | 3 monthly | 12 monthly |
| Repaired, serviced and second-hand equipment | After repair or service which could affect the electrical safety, or on reintroduction to service, refer to AS/NZS 5762 | | | | |

Note 1: Portable Residual Current Devices shall be tested and tagged according to the location that the device will be used.

Note2: Specified equipment for the purpose of manufacturing work must be connected to a fixed RCD (*Electrical Safety Regulation (Qld)*, section 108).

| | | | | | |
|-------------------|---------------------------|--|------------------------------|--|-------------------|
| Version No. 11 | Document No. PRO-00006 | Document Owner: Programs & Systems Business Partner | Approval Date: 19/08/2024 | Document Approver: Manager Health, Safety & Quality | Page: 58 of 65 |
|-------------------|---------------------------|--|------------------------------|--|-------------------|

Appendix D – High Voltage access flowchart

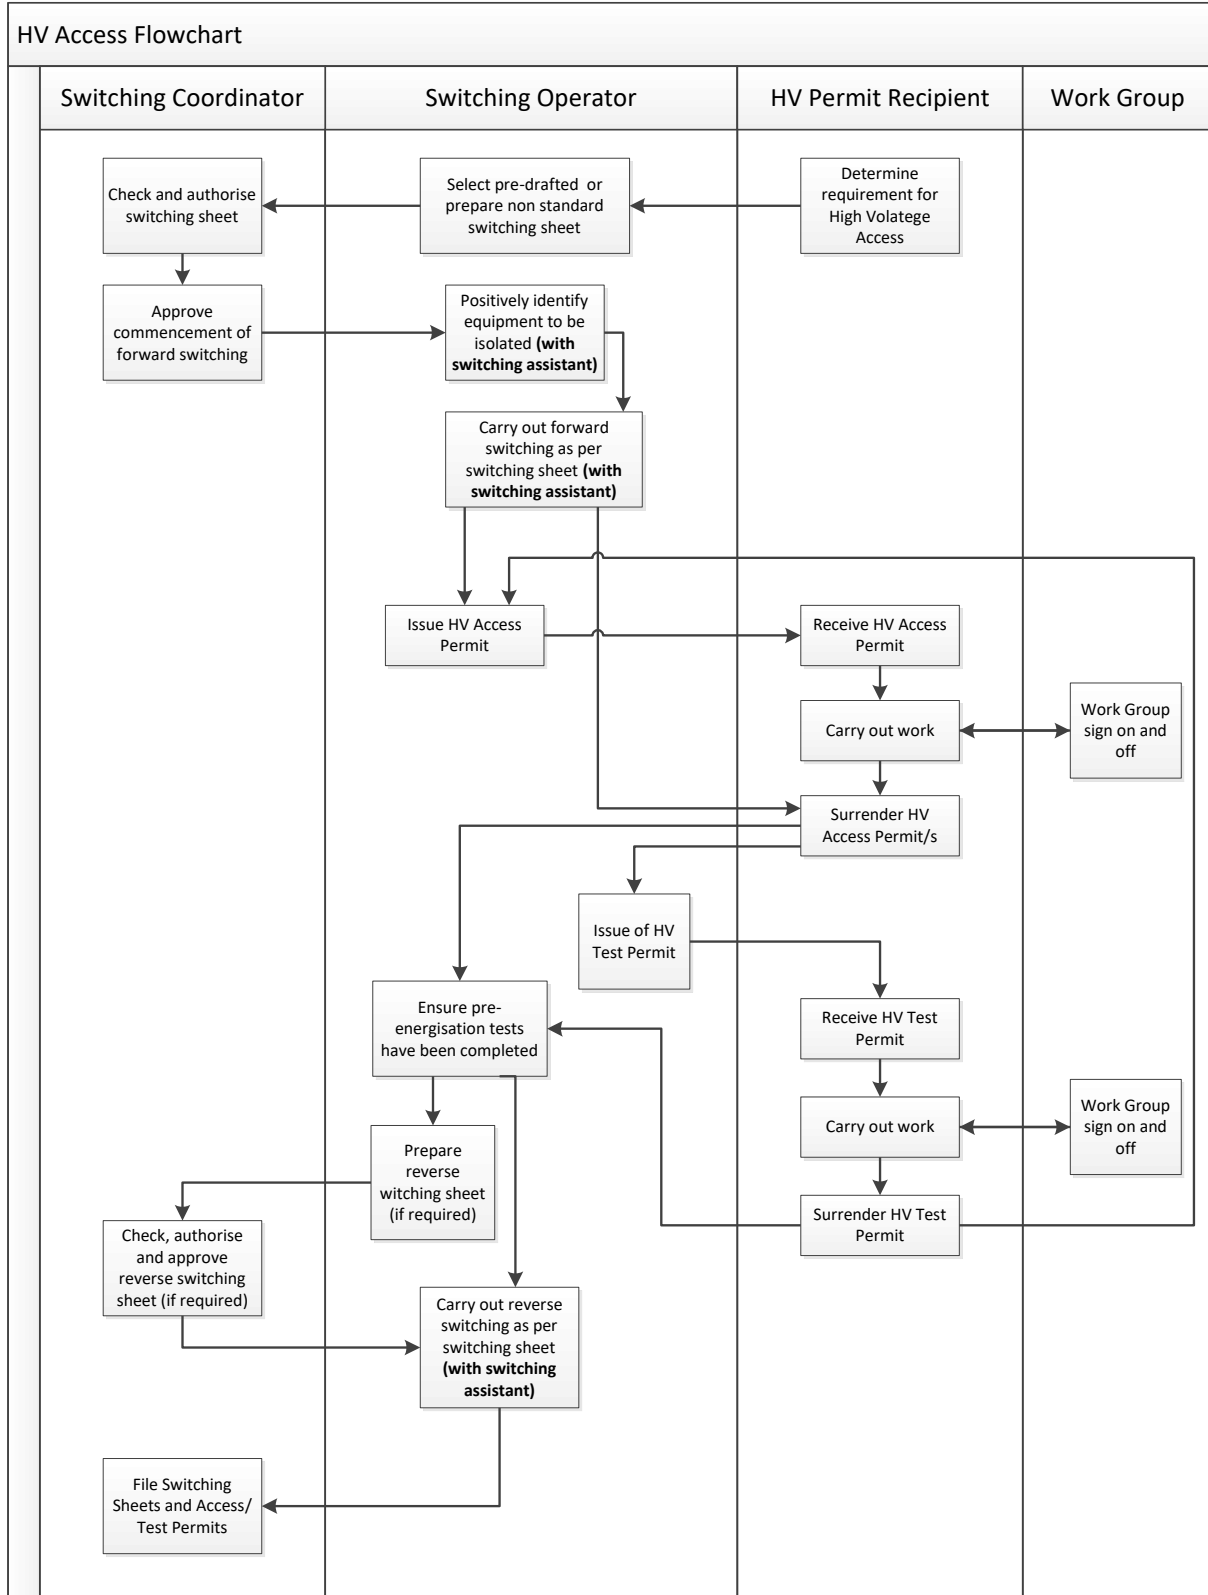

| | | | | | |
|--------------------------|----------------------------------|---|-------------------------------------|---|--------------------------|
| Version No. 11 | Document No. PRO-00006 | Document Owner: Programs & Systems Business Partner | Approval Date: 19/08/2024 | Document Approver: Manager Health, Safety & Quality | Page: 59 of 65 |
|--------------------------|----------------------------------|---|-------------------------------------|---|--------------------------|

Appendix E – High Voltage Isolation and Access (HVIA) requirements

| HVIA access requirements | | | | | |
|---|--|--|---|---|---------------------------------|
| HV access requirement | Switching Coordinator requirement | Switching Operator requirement | Recipient requirement | Switching Assistant requirement | |
| 1. Direct contact High Voltage access. (electrical contact) | Must be authorised HVIA competent electrical fitter mechanic or electrical (power) engineer intimate with the workplace*. | Must be authorised HVIA competent electrical fitter mechanic or electrical (power) engineer. | ^ Must be authorised, HVIA trained or authorised by Switching Coordinator to perform a specific task. | Must be competent electrical Safety Observer with understanding of HV process and attend HVIA training. | |
| 2. High Voltage operational Switching | Must be authorised HVIA competent electrical fitter mechanic or electrical (power) engineer intimate with the workplace*. | Must be authorised HVIA competent electrical fitter mechanic or electrical (power) engineer. | | Must be competent electrical Safety Observer with understanding of HV process and attend HVIA training. | |
| 3. Non-contact High Voltage access | Must be authorised HVIA competent electrical fitter mechanic or electrical (power) engineer familiar with the workplace. | Must be authorised HVIA competent electrical fitter mechanic or electrical (power) engineer. | Not required, Seqwater tag out lock out system applies. | Must be competent electrical Safety Observer with understanding of HV process and attend HVIA training. | |
| Non HVIA access requirements | | | | | |
| Access requirement | Type of access | Switching Coordinator requirement | Switching Operator requirement | Recipient requirement | Switching Assistant requirement |
| 1. Process Isolation | E.g. Normal shutdown, low risk cleaning near High Voltage equipment (no immediate hazard exists). If hazard exists, refer to non-contact HV access above. | | | | |
| | | The person in control of the Electrical Equipment using the Seqwater energy isolation system performs control isolation. If hazards exist, refer to non-contact HV access above. Note: A hazard exists if the person or any equipment worked on is within three metres of an exposed High Voltage part. | | | |
| Definitions | | | | | |
| Term | Explanation | | | | |
| High Voltage Operational Switching | Where load shifting, isolating of HV equipment is required and there is no possibility of direct High Voltage contact or intrusion into High Voltage zones. Does not include normal day-to-day operational activity of stop/start of High Voltage equipment. | | | | |
| * Intimate with site | A person with the specified training and qualifications who has in-depth local knowledge of the HV installation and is competent to authorise non-standard Switching Sheets. | | | | |
| ^ Switching Coordinator | May authorise a service provider on a temporary basis to perform a specific task or testing function required. It is the Switching Coordinator's responsibility to confirm the service provider is competent to receive an HV Access Permit or Test Permit. | | | | |

| | | | | | |
|-------------------|---------------------------|--|------------------------------|--|-------------------|
| Version No. 11 | Document No. PRO-00006 | Document Owner: Programs & Systems Business Partner | Approval Date: 19/08/2024 | Document Approver: Manager Health, Safety & Quality | Page: 60 of 65 |
|-------------------|---------------------------|--|------------------------------|--|-------------------|

Appendix F – Guide to selection of Personal Protective Equipment


| GUIDE TO THE SELECTION OF PERSONAL PROTECTIVE EQUIPMENT | | | |
|---|--|---|---|
| TASK | CURRENTS UP TO AND INCLUDING 100 A | CURRENT EXCEEDING 100 A AND UP TO AND INCLUDING 400 A | CURRENTS EXCEEDING 400 A |
| Work (isolated and verified) | Footwear Protective clothing (if required) Eye protection (if required) Gloves (if required) Hearing protection (if required) Safety helmet (if required) Respiratory protection (if required) | Footwear Protective clothing (if required) Eye protection (if required) Gloves (if required) Hearing protection (if required) Safety helmet (if required) Respiratory protection (if required) | Footwear Protective clothing (if required) Eye protection (if required) Gloves (if required) Hearing protection (if required) Safety helmet (if required) Respiratory protection (if required) |
| Switching, isolating, removing fuses or links | Footwear Protective clothing Eye protection Gloves (if required) Hearing protection (if required) Safety helmet (if required) Respiratory protection (if required) | Footwear Protective clothing Eye protection Gloves Hearing protection (if required) Safety helmet (if required) Respiratory protection (if required) | Footwear Protective clothing Eye protection Gloves Hearing protection (if required) Safety helmet (if required) Respiratory protection (if required) |
| Isolation verification, testing or fault finding | Footwear Protective clothing Eye protection Gloves Hearing protection (if required) Safety helmet (if required) Respiratory protection (if required) | Footwear Protective clothing* Eye protection Gloves Arc flash suit and hood (if required) Hearing protection (if required) Safety helmet (if required) Respiratory protection (if required) Face shield (if required) | Footwear Protective clothing* Eye protection Gloves Face shield Arc flash suit and hood (if required) Hearing protection (if required) Safety helmet (if required) Respiratory protection (if required) |
| Live electrical work | Footwear Protective clothing* Eye protection Insulating gloves Arc flash suit and hood (if required) Flame-resistant gloves (if required) Face shield (if required) Safety helmet (if required) Hearing protection (if required) Respiratory protection (if required) | Footwear Protective clothing * Eye protection Safety helmet Insulating gloves Arc flash suit and hood (if required) Flame-resistant gloves (if required) Face shield (if required) Hearing protection (if required) Respiratory protection (if required) | Footwear Protective clothing * Eye protection Insulating gloves Flame-resistant gloves Arc flash suit and hood Hearing protection Respiratory protection (if required) |
| *(if required)*: Determined by the risk assessment. * Collar up, top buttons done up and sleeves down. | | Bracelets, rings, neck chains, exposed metal zips, watches, and other conductive items shall not be worn while working on or near exposed energized conductors or live conductive parts. | |


Appendix G– Electrical Licencing Requirements

Table 1: Electrical Contractor Licencing Requirements

| Type of Electrical Contractor Licence | Minimum Requirement | Type of Electrical Work being engaged | Engagement Requirements | Who should know / approve engagement |
|---------------------------------------|---|--|---|--|
| | <p>GOLD LICENCE: A business with a gold electrical contractor licence is licensed to perform all types of Electrical Work for the public.</p> | <ul style="list-style-type: none"> Installing or altering a switchboard or Safety Switches. Installing a ceiling fan or power points. Maintaining a processing plant. Installing or altering wiring or fixed appliances in a building. | <p>Sustaining Capital can engage and manage electrical contractors without communicating with Sub-Region Electrical Senior Trade.</p> <p>Stakeholder Engagement would identify the works to the Maintenance – Regional Electrical Supervisor and Technical Specialist.</p> <p>Non-POD should communicate always with Maintenance before electrical contractor work commences.</p> | <p>Project Manager or Engaging Officer. Maintenance – Regional Electrical Supervisor.</p> <p>Maintenance – Regional Electrical Supervisor and Sub-Region Electrical Senior Trade</p> |
| | <p>SILVER LICENCE: The holder of a silver electrical contractor licence. This licence <u>does not</u> allow the person to install Electrical Equipment. Do not use the services of an electrical contractor to perform work which is not covered by their licence.</p> | <ul style="list-style-type: none"> Contractor completing maintenance on air-conditioning units. Need to check this. Contractor completing motor maintenance. | <p>Stakeholder Engagement would identify the works to the Maintenance – Regional Electrical Supervisor and Technical Specialist.</p> <p>Non-POD should communicate always with Maintenance before electrical contractor work commences.</p> | |
| | <p>SILVER LICENCE continued: Restricted to the testing, maintenance and repair of the type and voltage of Electrical Equipment printed on the reverse of the licence.</p> | <ul style="list-style-type: none"> Test and tag RCD/Contractor. | | |

Table 2: Electrical Workers Licencing Requirements
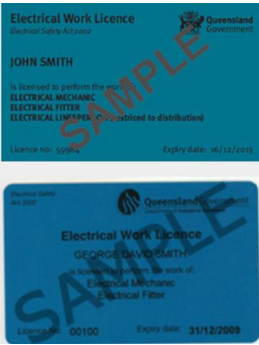
| Type of Electrical Contractor Licence | Minimum Requirement | Type of Electrical Work being engaged | Engagement Requirements | Who should know / approve engagement |
|---|--|--|-------------------------|--------------------------------------|
|  | <p>BLUE LICENCE: In Queensland, a person can only perform Electrical Work if they hold an Electrical Work licence. An Electrical Work licence can be issued in a number of classes. The type of Electrical Work the person is licensed to perform is printed on the front of the licence.</p> | <ul style="list-style-type: none"> Installing or altering a switchboard or Safety Switches. Installing a ceiling fan or power points. Maintaining a processing plant. Installing or altering wiring or fixed appliances in a building. | | |
| | Electrical Fitter | Blue/Aqua Electrical Worker licence – Generally performs work inside switchboards. | | |
| | Electrical Mechanic | Blue/Aqua Electrical Worker licence - Generally performs installation works in the field and switchboards. | | |
| | Electrical Linesperson | Blue/Aqua Electrical Worker licence - Generally performs installation and maintenance on overhead poles and wires. | | |
| | Electrical Jointer | Blue/Aqua Electrical Worker licence - Generally performs installation and maintenance on overhead poles and wires. | | |

| Type of Electrical Contractor Licence | Minimum Requirement | Type of Electrical Work being engaged | Engagement Requirements | Who should know / approve engagement |
|---|---|--|-------------------------|--------------------------------------|
|  | <p>GREEN LICENCE: A green Electrical Work licence means the worker is restricted to particular types of equipment and types of work. A restricted Electrical Work licence does not cover the installation of Electrical Equipment.</p> | <ul style="list-style-type: none"> • Repairing/maintaining an air conditioner. • Repairing/maintaining • Cathodic Protection. • Testing/maintaining plug in electronic equipment to 250 Volts. • Contractor completing maintenance on Cathodic Protection units, also should hold appropriate NACE qualification. | | |

| | | | | | |
|-------------------|---------------------------|--|------------------------------|--|-------------------|
| Version No. 11 | Document No. PRO-00006 | Document Owner: Programs & Systems Business Partner | Approval Date: 19/08/2024 | Document Approver: Manager Health, Safety & Quality | Page: 64 of 65 |
|-------------------|---------------------------|--|------------------------------|--|-------------------|

Appendix H – Installation Safety Management Plan Requirements

A person conducting a business or undertaking (PCBU) that has a High Voltage electrical installation should prepare an installation safety management plan for their workplace. The plan should address the risks associated with the operation and maintenance of the High Voltage installation. This may include:

- a single line diagram for the installation, showing all switches and circuit breakers and their identifying labels or numbers
- site-specific operating rules covering all aspects of operating the High Voltage installation, including procedures for arranging isolation of the installation from the local electricity network
procedures for identifying Hazardous Areas including any confined spaces associated with the installation
- competency requirements for persons who may be permitted to operate or work on the high voltage installation, including appropriate requirements for re-training, re-testing and reaccreditation
induction procedures for new contractors
regular inspection and maintenance programs to ensure the installation remains serviceable and safe
- procedures for ensuring there is no extension or alteration of the installation without permission from the local electricity supply authority
procedures for the safe handling of insulating oils and other substances that may be required for maintenance or repair
- procedures including warning signs for ensuring that no parts of the High Voltage installation (e.g. underground cables and High Voltage overhead powerlines) are damaged by heavy vehicles or other mobile plant, for example mobile cranes.

| Version No. | Document No. | Document Owner: | Approval Date: | Document Approver: | Page: |
|-------------|--------------|-------------------------------------|----------------|----------------------------------|----------|
| 11 | PRO-00006 | Programs & Systems Business Partner | 19/08/2024 | Manager Health, Safety & Quality | 65 of 65 |